Alibaba.com Gold Supplier 5th year

Alibaba.com Assessed Supplier

CENTRAL STAR 中尚

Proud Member of NAMM

Ningbo Central Star Electronic Technology Co.,Ltd
2nd flr, Bldg 2, #588 meidisi Rd, Wuxiang Industrial Zone,
Yinzhou District, Ningbo China 315111
Tel:86-574-87402683
Fax:86-574-87841171
E-mail:info@cn-audio.com
www.cn-audio.com

ACCURACY PRO AUDIO Catalog 2014

Vol.2014

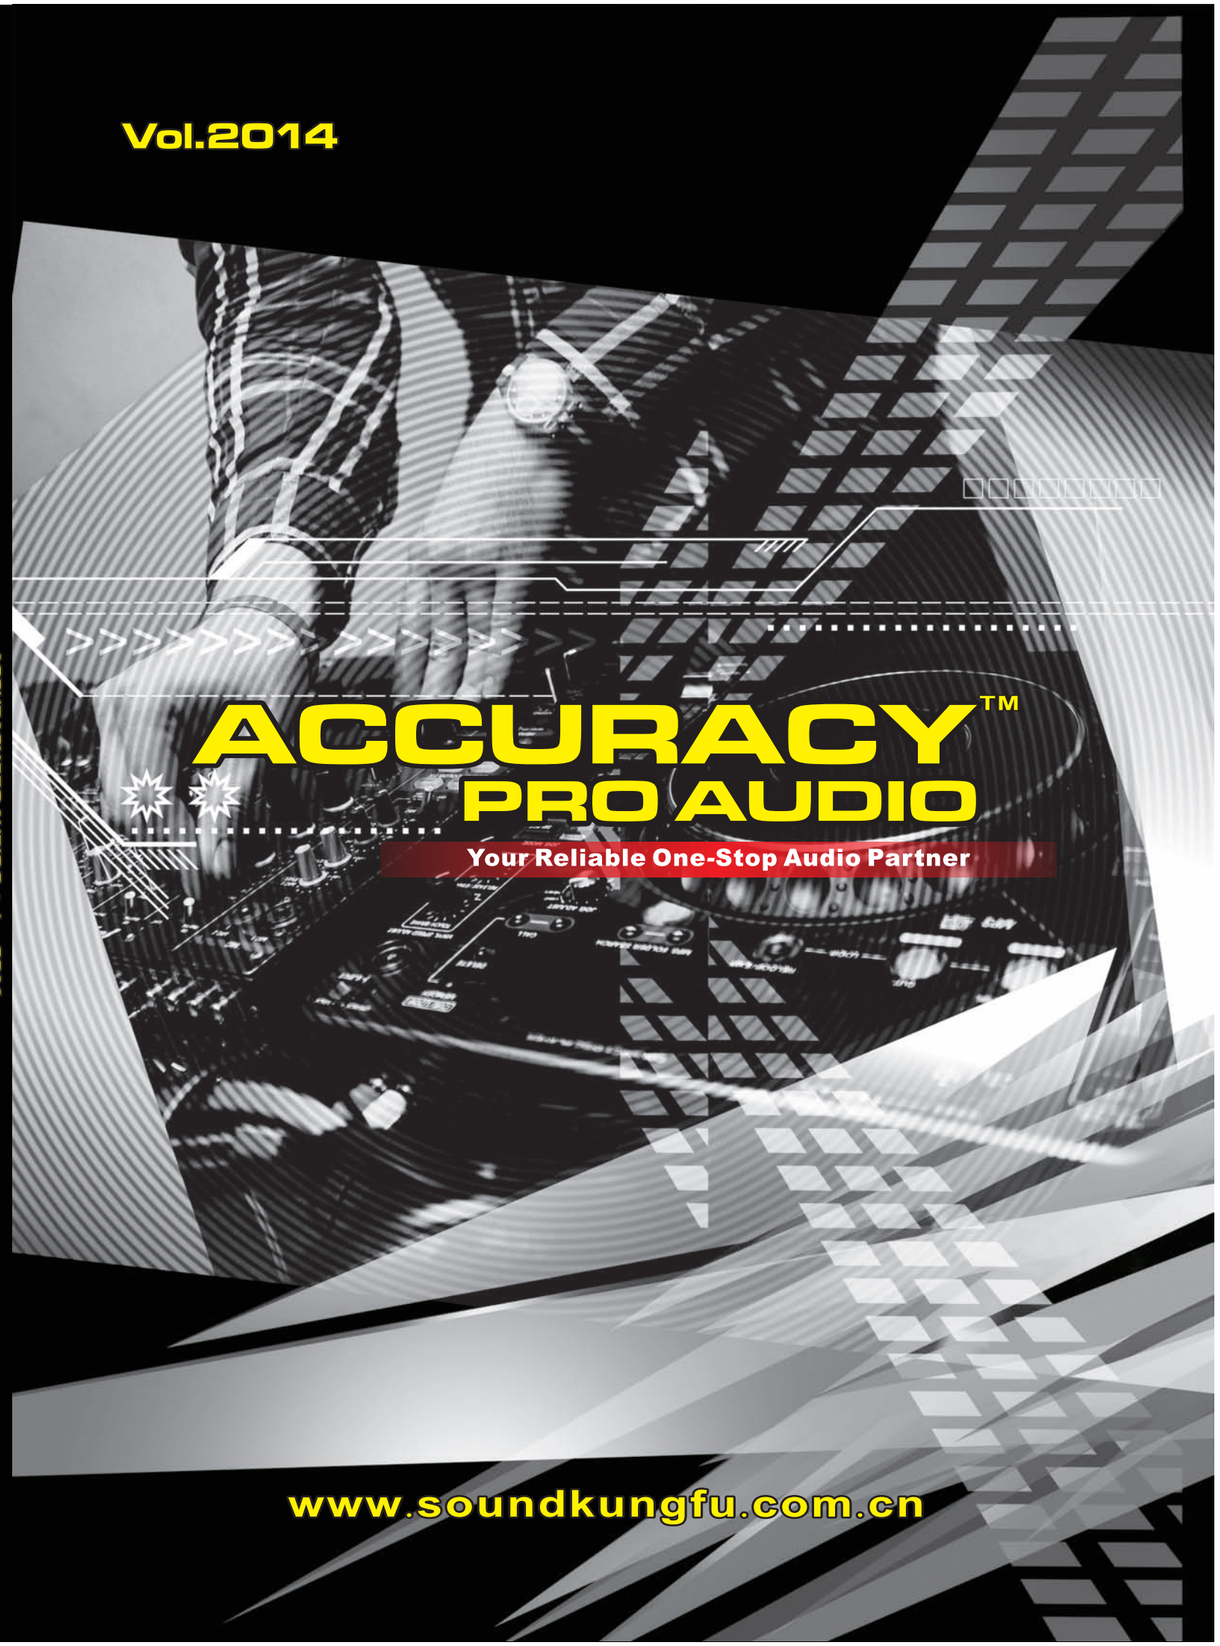

ACCURACY™ PRO AUDIO

Your Reliable One-Stop Audio Partner

www.soundkungfu.com.cn

2013 11 29 16:24:32

COMPANY PROFILE:

Ningbo Central Star Electronic Technology Co.,Ltd , a reliable professional audio expert, we provide our customers with user-friendly audio equipment that combines unmatched reliability with advanced performance features.

Our diverse product mix includes Speakers, DJ equipments, Mixing Consoles and Cables&Stands with associated accessories sold under our Accuracy Pro Audio brand.

We are not the big A company, but we are one different from most, we care for customers all the time, here is how you will get from us:

1,PROMISE: We do what we promise on price , quality ,delivery time and after service
2,HONESTY: You will get whatever been told,you get real report on what is going on with your order
3,EFFICIENCY: We have deeper understanding on all the possible situation and action fast and accurate
4,FLEXIBLE: You can get all you need at lower MOQ with OEM/ODM from us at the same quality guaranteed, multiple payment term available include credit payment
5,DIFFERENTIATION: This is key to get rid of competition, we always working on innovation for extra added value to increase competitive power

Drawing on the strength of this organization and our passion for detail, Ningbo Central Star is committed to providing its customers with the quality products that represents the best value for our customers audio investment. We are dedicated to your continued satisfaction.
Ningbo Central Star-Your reliable professional audio expert!

CONTENTS

PRO BATTERY POWERED SPEAKER.....2-3

PLASTIC CABINET SPEAKERS.....4-9

DJ SPEAKERS.....10

WOODEN CABINET SPEAKERS.....11-16

COMMERCIAL SPEAKERS 17-18

PROFESSIONAL WOOFERS&DRIVERS.....19-21

STUDIO MONITORS.....22

PORTABLE PA SYSTEMS.....23-25

DJ CONTROLLERS.....26-29

PROFESSIONAL AUDIO MIXERS.....30-37

PROFESSIONAL POWER AMPLIFIERS.....38-43

MICROPHONES.....44-48

PROCESSORS.....49-53

PRO CABLES&CONNECTORS.....54-75

STANDS&RACKS.....76-91



PRO BATTERY POWERED TROLLEY SPEAKER

PMP08AU-V1BP-BT

TSU08AU-V1BP-BT

TSX08AU-V1BP-BT

TSR08AU-V1BP-BT

NEW

PMP08AU-V1BP-BT
TSU08AU-V1BP-BT
TSX08AU-V1BP-BT
TSR08AU-V1BP-BT

1 channel for MIC/LINE inputs accept 1 wireless microphone(VHF)
1 group of LINE input
Built-in MP3 player with LED display,remote control and record
Built-in bluetooth input/Remote Control
With turn on delay protection
Rated power:65W/4ohm
Built-in 12V storage battery, can be charged
Power supply:AC110V-240V (switch power supply); DC12V

TST10AU-V2BP-BT

TSU10AU-V2BP-BT

TSX10AU-V2BP-BT

TSR10AU-V2BP-BT

NEW

TST10AU-V2BP-BT
TSU10AU-V2BP-BT
TSX10AU-V2BP-BT
TSR10AU-V2BP-BT

1 channel for MIC/LINE inputs accept 2 wireless microphones(VHF)
1 group of LINE input and output
Built in digital delay effector
Built-in MP3 player with LED display,remote control
Built-in bluetooth input/Echo
With turn on delay protection
Rated power:100W/4ohm
Built-in 12V storage battery, can be charged
Power supply:AC110V-240V (switch power supply); DC12V

TSV15AUQ-V2BP-BT

TSI15AUQ-V2BP-BT

TSL15AUQ-V2BP-BT

NEW

TSV15AUQ-V2BP-BT
TSI15AUQ-V2BP-BT
TSL15AUQ-V2BP-BT

Battery powered 100W 15" active featured:
Bluetooth/USB/SD/Remote Control/3 band EQ/Echo/Speakon
Blue Dynamic LCD: Track title/Multiple Folder Search
Multiple charger Protection Run For 3.5-8 Hours
Power Supply: AC+DC+Battery Operation
Double Transmitter, 2 Receiver Wireless Micphone

p2-3充电音箱.indd 2 2013-11-29 16:08:51

PRO BATTERY POWERED TROLLEY SPEAKER

PMD15AUQ-V2BP-BT

CSM15AUQ-V2BP-BT

PMD15AUQ-V2BP-BT
CSM15AUQ-V2BP-BT

Battery powered 100W 15" active featured:
Bluetooth/USB/SD/Remote Control/3 band EQ/Echo/Speakon
Blue Dynamic LCD: Track title/Multiple Folder Search
Multiple charger Protection Run For 3.5-8 Hours
Power Supply: AC+DC+Battery Operation
Double Transmitter, 2 Receiver Wireless Micphone

CSW15AUQ-V2BP-BT

CSD15AUQ-V2BP-BT

CSW15AUQ-V2BP-BT
CSD15AUQ-V2BP-BT

Battery powered 100W 15" active featured:
Bluetooth/USB/SD/Remote Control/3 band EQ/Echo/Speakon
Blue Dynamic LCD: Track title/Multiple Folder Search
Multiple charger Protection Run For 3.5-8 Hours
Power Supply: AC+DC+Battery Operation
Double Transmitter, 2 Receiver Wireless Micphone

PML12AUQ-V2BP-BT
Battery powered 100W 12" active speaker

PML15AUQ-V2BP-BT
Battery powered 100W 15" active featured:
Bluetooth/USB/SD/Remote Control/3 band EQ/Echo/Speakon
Blue Dynamic LCD: Track title/Multiple Folder Search
Multiple charger Protection Run For 3.5-8 Hours
Power Supply: AC+DC+Battery Operation
Double Transmitter, 2 Receiver Wireless Micphone

PMH12AUQ-V2BP-BT
Battery powered 120W 12" active speaker

PMH15AUQ-V2BP-BT
Battery powered 150W 15" active speaker
2 channels for MIC/LINE inputs accept 2 wireless microphones(VHF)
1 group of LINE input and output
With digital delay effector
Built-in 5-band EQ
Built-in blue tooth input
With speaker crossover
Built-in 12V storage battery, can be charged
With turn on delay protection
Power supply:AC110V/60HZ-240V/50HZ (switch power supply); DC12V
With turn on delay protection
Power supply:AC110V/60HZ-240V/50HZ (switch power supply); DC12V

p2-3充电音箱.indd 3 2013-11-29 16:08:57

PLASTIC CABINET SPEAKERS

CSA SERIES

PMA SERIES

CSC SERIES

CSA15
PMA15
CSC15

- ◆350W 15" passive speaker
- ◆99dB SPL
- ◆124dB Max.
- ◆8ohm Impedance
- ◆40-20KHZ Freq. Res.
- ◆1.75" Titanium compression driver
- ◆3.0"KSV VC/ 60OZ magnet

CSA15AUQ-BT
PMA15AUQ-BT
CSC15AUQ-BT

- ◆180W 15" active speaker
- ◆Bluetooth/USB/SD/EQ/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display
- ◆Track list/title
- ◆1.34" Titanium compression driver
- ◆2.5"KSV VC/ 50OZ magnet

CSA15AUR-BT
PMA15AUR-BT
CSC15AUR-BT

- ◆180W 15" active speaker
- ◆Bluetooth/USB/SD/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Digital display
- ◆1.34" Titanium compression driver
- ◆2.5"KSV VC/ 50OZ magnet

CSA15AU-BT(300W)
PMA15AU-BT(300W)
CSC15AU-BT(300W)

- ◆300W 15" active speaker
- ◆Bluetooth/USB/SD/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display
- ◆Track list/title
- ◆1.75" Titanium compression driver
- ◆3.0"KSV VC/ 80OZ magnet

CSM SERIES

PMD SERIES

CST SERIES

CSM15
PMD15
CST15

- ◆350W 15" passive speaker
- ◆99dB SPL
- ◆124dB Max.
- ◆8ohm Impedance
- ◆40-20KHZ Freq. Res.
- ◆1.75" Titanium compression driver
- ◆3.0"KSV VC/ 60OZ magnet

CSM15AUQ-BT
PMD15AUQ-BT
CST15AUQ-BT

- ◆180W 15" active speaker
- ◆Bluetooth/USB/SD/EQ/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display
- ◆Track list/title
- ◆1.34" Titanium compression driver
- ◆2.5"KSV VC/ 50OZ magnet

CSM15AUR-BT
PMD15AUR-BT
CST15AUR-BT

- ◆180W 15" active speaker
- ◆Bluetooth/USB/SD/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Digital display
- ◆1.34" Titanium compression driver
- ◆2.5"KSV VC/ 50OZ magnet

CSM15AU-BT
PMD15AU-BT
CST15AU-BT

- ◆180W 15" active speaker
- ◆Bluetooth/USB/SD/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display
- ◆Track list/title
- ◆1.34" Titanium compression driver
- ◆2.5"KSV VC/ 50OZ magnet

P4-10塑料音响.indd 4 2013-11-29 16:48:46

PLASTIC CABINET SPEAKERS

CSW SERIES

CSW15

◆350W 15" passive speaker
◆99dB SPL
◆124dB Max.
◆8ohm Impedance
◆40-20KHZ Freq. Res.
◆1.75"Titanium compression driver
◆3.0"KSV VC/ 60OZ magnet

CSW15AU-BT(300W)

◆300W 15" Bluetooth active speaker
◆Bluetooth/USB/SD/Speakon
◆Multiple Folder Search
◆FM radio/Remote Control
◆Dynamic LCD display
◆Track list/title
◆1.75"Titanium compression driver
◆3.0"KSV VC/ 80OZ magnet

CSW15AUQ-BT

◆180W 15" active speaker
◆Bluetooth/USB/SD/EQ/Speakon
◆Multiple Folder Search
◆FM radio/Remote Control
◆Dynamic LCD display
◆Track list/title
◆1.34"Titanium compression driver
◆2.5"KSV VC/ 50OZ magnet

CSW15AUQ-MP5

◆180W 15" active speaker with MP5 player
◆5-band graphic equalizer
◆1ch Mic input 1/4"&XLR(F)w/volume control
◆1ch Line input RCA"&XLR(F)w/ volume control
◆1ch Line output 1/4"&XLR(M)
◆MP5 with volume control and MASTER volume control
◆1.34" Titanium compression driver
◆2.5"KSV VC/ 50OZ magnet

PMO SERIES

PMO15

◆350W 15" passive speaker
◆99dB SPL
◆124dB Max.
◆8ohm Impedance
◆40-20KHZ Freq. Res.
◆1.75"compression driver
◆3.0"KSV VC 60OZ magnet

PMO15AUQ-BT

◆180W 15" active speaker
◆Bluetooth/USB/SD/EQ/Speakon
◆Multiple Folder Search
◆FM radio/Remote Control
◆Dynamic LCD display
◆Track list/title
◆1.34"compression driver
◆2.5"KSV VC 50OZ magnet

PMO15AFE-BT(300W)

◆300W 15" Bluetooth active speaker
◆USB/SD/5-band EQ/Echo effects
◆Folder Search/Speakon
◆FM radio/Remote Control
◆Dynamic LCD display
◆Track list/title
◆1.75" Titanium compression driver
◆3.0"KSV VC/ 80OZ magnet

PMO15AP

◆RMS 400W powered speaker
◆2 Channel 1/4" jack mic input with volume control
◆2-band EQ (treble&bass)
◆1 Channel Line in and MIX ouput
◆1.75" Titanium compression driver
◆3.0"KSV VC/ 60OZ magnet

P4-10塑料音响.indd 5 2013-11-29 16:48:57

PLASTIC CABINET SPEAKERS

PMQ SERIES

PMQ15
PMY15
PMU15

◆350W 15" passive speaker
◆99dB SPL
◆124dB Max.
◆8ohm Impedance
◆40-20KHZ Freq. Res.
◆1.75"compression driver
◆3.0"KSV VC/ 60OZ magnet

PMQ08AUR-BT
PMY08AUR-BT
PMU08AUR-BT

◆Bluetooth 75W 8" active speaker
◆USB/SD/Remote Control
◆LED digital display/FM radio
◆1" Titanium compression driver
◆1.0 "KSV VC/ 20OZ magnet

CSY SERIES

PMQ10AUR-BT
PMY10AUR-BT
PMU10AUR-BT

◆Bluetooth 120W 10" active speaker
◆USB/SD/Remote Control
◆Digital display/FM radio
◆1" Titanium compression driver
◆1.5 "KSV VC/ 25OZ magnet

PMQ12AUR-BT
PMY12AUR-BT
PMU12AUR-BT

◆Bluetooth 150W 12" active speaker
◆USB/SD/Remote Control
◆Digital display/FM radio
◆1.34" Titanium compression driver
◆2.0 "KSV VC/ 35OZ magnet

PMU SERIES

PMQ15AUQ-BT
PMY15AUQ-BT
PMU15AUQ-BT

◆180W 15" active speaker
◆Bluetooth/USB/SD/EQ/Speakon
◆Multiple Folder Search
◆FM radio/Remote Control
◆Dynamic LCD display/Track list/title
◆1.34" Titanium compression driver
◆2.5"KSV VC/ 50OZ magnet

PMQ15AUQ-MP5
PMY15AUQ-MP5
PMU15AUQ-MP5

◆180W 15" active cabinet speaker with MP5 player
◆5-band graphic equalizer
◆1ch Mic input 1/4"&XLR(F)w/volume control
◆1ch Line input RCA"&XLR(F)w/volume control
◆1ch Line output 1/4"&XLR(M)
◆MP5 with volume control and MASTER volume control
◆1.34" Titanium compression driver
◆2.5"KSV VC/ 50OZ magnet

CSX SERIES

CSX15
PMT15
CSU15

◆350W 15" passive speaker
◆99dB SPL
◆124dB Max.
◆8ohm Impedance
◆40-20KHZ Freq. Res.
◆1.75"Titanium compression driver
◆3.0"KSV VC/ 60OZ magnet

CSX15AUQ-BT
PMT15AUQ-BT
CSU15AUQ-BT

◆180W 15" active speaker
◆Bluetooth/USB/SD/EQ/Speakon
◆Multiple Folder Search
◆FM radio/Remote Control
◆Dynamic LCD display
◆Track list/title
◆1.34" Titanium compression driver
◆2.5"KSV VC/ 50OZ magnet

PMT SERIES

CSX15AUD-BT
PMT15AUD-BT
CSU15AUD-BT

◆180W 15" active class-D speaker
◆Bluetooth/USB/SD/EQ/Echo
◆Multiple Folder Search
◆Remote Control/Speakon
◆Dynamic LCD display
◆Track list/title
◆1.34" Titanium compression driver
◆2.5"KSV VC/ 50OZ magnet

CSX15AFE-BT(300W)
PMT15AFE-BT(300W)
CSU15AFE-BT(300W)

◆300W 15" Bluetooth active speaker
◆USB/SD/5-band EQ/Echo effects
◆Folder Search/Speakon
◆FM radio/Remote Control
◆Dynamic LCD display
◆Track list/title
◆1.75" Titanium compression driver
◆3.0"KSV VC/ 80OZ magnet

CSU SERIES

P4-10塑料音响.indd 6 2013-11-29 16:49:21

PLASTIC CABINET SPEAKERS

B

E

F

P

S

Z

PMB15
PME15
PMF15
PMP15
PMS15
PMZ15

◆350W 15" passive speaker
◆99dB SPL
◆124dB Max.
◆8ohm Impedance
◆40-20KHZ Freq. Res.
◆1.75" Titanium compression driver
◆3.0"KSV VC/ 60OZ magnet

PMB08AU-BT
PME08AU-BT
PMF08AU-BT
PMP08AU-BT
PMZ08AU-BT

◆75W 8" active speaker
◆Bluetooth/USB/SD/Speakon
◆Multiple Folder Search
◆FM radio/Remote Control
◆Dynamic LCD display/Track list/title
◆1" Titanium compression driver
◆1.0 "KSV VC/ 20OZ magnet

PMB10AU-BT
PME10AU-BT
PMF10AU-BT
PMP10AU-BT
PMZ10AU-BT

◆120W 10" active speaker
◆Bluetooth/USB/SD/Speakon
◆Multiple Folder Search
◆FM radio/Remote Control
◆Dynamic LCD display/Track list/title
◆1" Titanium compression driver
◆1.5 "KSV VC/ 25OZ magnet

PMB12AU-BT
PME12AU-BT
PMF12AU-BT
PMP12AU-BT
PMS12AU-BT
PMZ12AU-BT

◆150W 12" active speaker
◆Bluetooth/USB/SD/Speakon
◆Multiple Folder Search
◆FM radio/Remote Control
◆Dynamic LCD display/Track list/title
◆1.34" Titanium compression driver
◆2.0 "KSV VC/ 35OZ magnet

PMB15AU-BT
PME15AU-BT
PMF15AU-BT
PMP15AU-BT
PMS15AU-BT
PMZ15AU-BT

◆180W 15" active speaker
◆Bluetooth/USB/SD/Speakon
◆Multiple Folder Search
◆FM radio/Remote Control
◆Dynamic LCD display/Track list/title
◆1.34" Titanium compression driver
◆2.5 "KSV VC 50OZ magnet

PMB15AUQ-BT
PME15AUQ-BT
PMF15AUQ-BT
PMP15AUQ-BT
PMS15AUQ-BT
PMZ15AUQ-BT

◆180W 15" active speaker
◆Bluetooth/USB/SD/EQ/Speakon
◆Multiple Folder Search
◆FM radio/Remote Control
◆Dynamic LCD display/Track list/title
◆1.34"Titanium compression driver
◆2.5"KSV VC/50OZ magnet

CSB15
CSE15
CSF15
CSP15
CSS15
CSZ15

◆350W 15" passive speaker
◆99dB SPL
◆124dB Max.
◆8ohm Impedance
◆40-20KHZ Freq. Res.
◆1.75"Titanium compression driver
◆3.0"KSV VC/ 60OZ magnet

CSB15AUQ-BT
CSE15AUQ-BT
CSF15AUQ-BT
CSP15AUQ-BT
CSS15AUQ-BT
CSZ15AUQ-BT

◆180W 15" active speaker
◆Bluetooth/USB/SD/EQ/Speakon
◆Multiple Folder Search
◆FM radio/Remote Control
◆Dynamic LCD display/Track list/title
◆1.34"Titanium compression driver
◆2.5"KSV VC/ 50OZ magnet

P4-10塑料音响.indd 7 2013-11-29 16:49:48

PLASTIC CABINET SPEAKERS

PML SERIES

PMK SERIES

PML15
PMK15

- ◆350W 15" passive speaker
- ◆95dB SPL
- ◆118dB Max.
- ◆8ohm Impedance
- ◆50-20KHZ Freq. Res.
- ◆1.75"compression driver
- ◆3.0"KSV VC/ 60OZ magnet

PML15AF-BT
PMK15AF-BT

- ◆180W 15" active speaker
- ◆Bluetooth/USB/SD/EQ/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display
- ◆Track list/title
- ◆1.34"compression driver
- ◆2.5"KSV VC/ 50OZ magnet

PML15AUI-1-BT
PMK15AUI-1-BT

- ◆180W 15" active speaker
- ◆Bluetooth
- ◆USB/SD/EQ/Ipod docking
- ◆2-band EQ (treble&bass)
- ◆Multiple Folder Search
- ◆Remote Control
- ◆Dynamic LCD display
- ◆Track list/title
- ◆1.34"Titanium compression driver
- ◆2.5"KSV VC/ 50OZ magnet

PML15AUR-C-BT
PMK15AUR-C-BT

- ◆150W 15" active speaker
- ◆USB/SD/Remote Control
- ◆Digital LED display/FM radio
- ◆Bluetooth
- ◆1.0" Titanium compression driver
- ◆2.0"KSV VC/ 35OZ magnet

PML08AUR-BT
PMK08AUR-BT

- ◆75W 8" active speaker
- ◆Bluetooth
- ◆USB/SD MP3 player
- ◆Remote Control
- ◆Digital LED display/FM radio
- ◆1.0" Titanium compression driver
- ◆1.0 "KSV VC/ 20OZ magnet

PML10AU-BT
PMK10AU-BT

- ◆120W 10" active speaker
- ◆Bluetooth/USB/SD/EQ/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display
- ◆Track list/title
- ◆1.0" Titanium compression driver
- ◆1.5"KSV VC/ 25OZ Magnet

PML12AUQ-BT
PMK12AUQ-BT

- ◆150W 12" active speaker
- ◆Bluetooth/USB/SD MP3 player
- ◆5-band EQ/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display
- ◆Track list/title
- ◆1.34"Titanium compression driver
- ◆2.0"KSV VC/ 35OZ magnet

PML15AUQ-BT
PMK15AUQ-BT

- ◆180W 15" active speaker
- ◆Bluetooth/USB/SD MP3 player
- ◆5-band EQ/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display
- ◆Track list/title
- ◆1.34"Titanium compression driver
- ◆2.5"KSV VC/ 50OZ magnet

P4-10塑料音响.indd 8 2013-11-29 16:50:02

PLASTIC CABINET SPEAKERS

TSD

TSI

TSL

TSM

TSV

TSD15
TSI15
TSL15
TSM15
TSV15

- ◆350W 15" passive trolley speaker
- ◆95dB SPL
- ◆118dB Max.
- ◆8ohm Impedance
- ◆50-20KHZ Freq. Res.
- ◆1.75"compression driver
- ◆3.0"KSV VC/ 60OZ magnet

TSD15AUQ-BT
TSI15AUQ-BT
TSL15AUQ-BT
TSM15AUQ-BT
TSV15AUQ-BT

- ◆180W 15" active trolley speaker
- ◆Bluetooth/USB/SD MP3 player
- ◆5-band EQ/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display
- ◆Track list/title
- ◆1.34"Titanium compression driver
- ◆2.5"KSV VC/ 50OZ magnet

TSD12AUR-BT
TSI12AUR-BT
TSL12AUR-BT
TSM12AUR-BT
TSV12AUR-BT

- ◆Bluetooth 150W 12" active trolley speaker
- ◆USB/SD/Remote Control
- ◆Digital display/FM radio
- ◆1.34" Titanium compression driver
- ◆2.0 "KSV VC/ 35OZ magnet

TSD15AUR-BT
TSI15AUR-BT
TSL15AUR-BT
TSM15AUR-BT
TSV15AUR-BT

- ◆Bluetooth 180W 15" active trolley speaker
- ◆USB/SD/Remote Control
- ◆LED screen Digital display/FM radio
- ◆1.34" Titanium compression driver
- ◆2.5 "KSV VC/ 50 OZ magnet

TSD12AU-BT
TSI12AU-BT
TSL12AU-BT
TSM12AU-BT
TSV12AU-BT

- ◆150W 12" active trolley speaker
- ◆Bluetooth/USB/SD/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display/Track list/title
- ◆1.34" Titanium compression driver
- ◆2.0 "KSV VC/ 35OZ magnet

TSD15AU-BT
TSI15AU-BT
TSL15AU-BT
TSM15AU-BT
TSV15AU-BT

- ◆180W 15" active trolley speaker
- ◆Bluetooth/USB/SD/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display/Track list/title
- ◆1.34" Titanium compression driver
- ◆2.5 "KSV VC 50OZ magnet

P4-10塑料音响.indd 9 2013-11-29 16:50:13

DJ SPEAKER

AS10B

◆Single 10" passive speaker
◆RMS power:100W
◆Impedance:6ohm
◆Sensitivity:89dB+/-3dB
◆Freq response:40HZ-20KHZ
◆Speaker units:10"+Tweeter
◆Carton size:67*40*55cm/Pair

AS12B

◆Single 12" passive speaker
◆RMS power:120W
◆Impedance:6ohm
◆Sensitivity:89dB+/-3dB
◆Freq response:40HZ-20KHZ
◆Speaker units:12"+Tweeter
◆Carton size:45*40*70cm/PC

AS15B

◆Single 15" passive speaker
◆RMS power:200W
◆Impedance:6ohm
◆Sensitivity:89dB+/-3dB
◆Freq response:40HZ-20KHZ
◆Speaker units:15"+Tweeter
◆Carton size:50*45*80cm/PC

AS170Q

◆Single 10" DJ Speaker
◆With USB/SD card reader
◆EQ/Karaoke function
◆Mic/guitar input function
◆DJ 7 color light shine
◆RMS power:2*65W
◆Freq response:20HZ-20KHZ
◆Impedance:4ohm

AS210Q

◆Double 10" DJ Speaker
◆With USB/SD card reader
◆EQ/Karaoke function
◆Mic/guitar input function
◆DJ 7 color light shine
◆RMS power:2*65W
◆Freq response:20HZ-20KHZ
◆Impedance:4ohm

AS206Q

◆Double 10" DJ Speaker
◆USB/SD reader/AUX input
◆With dream colorful DJ guard
◆Treble and bass ajustment function
◆RMS power:2*75W
◆Freq response:20HZ-20KHZ
◆Impedance:8ohm
◆Carton size:300*328*880mm

AS252Q

◆Double 10" DJ Speaker
◆USB/SD reader/AUX input
◆With EQ function
◆With 2*wireless microphone
◆With 7 colorful disco light shine
◆RMS power:2*75W
◆Freq response:20HZ-20KHZ
◆Impedance:8ohm
◆Carton size:340*345*890mm

AS267

◆Double 10" DJ speaker
◆with USB SD Mixer
◆Colourful lights
◆Frequency response:50HZ-20KHZ
◆Voice coil:25mm
◆Sensitivity：98±3db (1w/1m)
◆Impedance:4ohm
◆RMS Power:2*190W

AS225

◆Double 15inch DJ speaker
◆with USB SD Mixer
◆Colourful lights
◆one Microphone
◆Frequency response:40HZ-20KHZ
◆Sensitivity:98±3db（1w/1m）
◆Voice coil:25mm
◆Impedance:4ohm
◆RMS Power:2*230W

P4-10塑料音响.indd 10 2013-11-29 16:50:14

PRO WOODEN CABINET SPEAKERS

E SERIES PRO SPEAKER

Features:
Sturdy 18mm MDF enclosure
Full-length, black powder coated steel grille

NEW

Applications:
Live sound reinforcement for vocals and musical instrument
Mobile DJs, Night clubs Sound system rental

E12ML/E15ML

E12L/E15L

E212L

E215L

E15SL

E18SL

Model	E12L / E12ML	E15L / E15ML	E212L	E215L	E15SL	E18SL
System Type:	12" 2-way passive speaker	15" 2-way passive speaker	Dual 12" 2-Way passive speaker	Dual 15" 2-Way passive speaker	15" passive Subwoofer	18" passive Subwoofer
Frequency Range(-10db):	20-20KHZ	20-20KHZ	20-20KHZ	20-20KHZ	20-1000HZ	20-1000HZ
Crossover Frequency:	3.0 KHZ	3.0 KHZ	3.0 KHZ	3.0 KHZ	N/A	N/A
Long-tern Power (RMS):	200W	300W	400W	600W	400W	600W
Sensitivity (db(1W@1m)):	96db	97db	98db	99db	98db	100db
Maximum SPL:	121 db	125 db	125 db	127 db	129 db	130 db
LF Driver:	1x12" steel woofer 2.5"VC 50 OZ	1x15" steel woofer 2.5"VC 50 OZ	2x12" steel woofer 2.5"VC 50 OZ	2x15" steel woofer 2.5"VC 50 OZ	1x15" subwoofer 3"VC 60 OZ	1x18" subwoofer 3"VC 80 OZ
HF Driver:	1.35" titanium compression driver	1.35" titanium compression driver	1.35" titanium compression driver	1.35" titanium compression driver	N/A	N/A
Impedance:	8 ohm	8 ohm	8 ohm	8 ohm	8 ohm	8 ohm
Enclosure:	18mm MDF	18mm MDF	18mm MDF	18mm MDF	18mm MDF	18mm MDF
Coverage Angle(H x V):	60x90°	60x90°	60x90°	60x90°	N/A	N/A

P11-16木音响修改.indd 11 2013-11-29 16:49:11

PRO WOODEN CABINET SPEAKERS

WR SERIES PRO SPEAKER

Features:

Sturdy 18mm MDF enclosure

Full-length, black powder coated steel grille

NEW

Applications:

Live sound reinforcement for vocals and musical instrument

Mobile DJs, Night clubs Sound system rental

WR12

WR15

WR212

WR215

WR15S

WR18S

Model	WR12	WR15	WR212	WR215	WR15S	WR18S
System Type	12" 2-way passive speaker	15" 2-way passive speaker	Dual 12" 2-Way passive speaker	Dual 15" 2-Way passive speaker	15" passive Subwoofer	18" passive Subwoofer
Frequency Range(-10db):	20-20KHZ	20-20KHZ	20-20KHZ	20-20KHZ	20-1000HZ	20-1000HZ
Crossover Frequency:	3.0 KHZ	3.0 KHZ	3.0 KHZ	3.0 KHZ	N/A	N/A
Long-tern Power (RMS):	300W/400W	300W/400W	600W	800W	600W	800W
Sensitivity (db(1W@1m)):	96db	97db	98db	99db	98db	100db
Maximum SPL:	123 db	126 db	127 db	129 db	130 db	132 db
LF Driver:	1x12" steel woofer 3"VC 60 OZ	1x15" steel woofer 3"VC 60 OZ	2x12" steel woofer 3"VC 60 OZ	2x15" steel woofer 3"VC 60 OZ	1x15" aluminium woofer 4"VC 100 OZ	1x18" aluminium woofer 4"VC 125 OZ
HF Driver:	1.75" titanium compression driver	1.75" titanium compression driver	1.75" titanium compression driver	1.75" titanium compression driver	N/A	N/A
Impedance:	8 ohm	8 ohm	8 ohm	8 ohm	8 ohm	8 ohm
Enclosure:	18mm MDF	18mm MDF	18mm MDF	18mm MDF	18mm MDF	18mm MDF
Coverage Angle(H x V):	60x90°	60x90°	60x90°	60x90°	N/A	N/A

P11-16木音响修改.indd 12 2013-11-29 16:49:21

PRO WOODEN CABINET SPEAKERS

WP-L SERIES PRO SPEAKER

Features:
Sturdy 18mm MDF enclosure
Full-length, black powdercoated steel grille

Applications:
Live sound reinforcement for vocals and musical instrument Mobile DJs, Night clubs Sound system rental

WP12L

WP15L

WP18SL

WP215L

WP218SL

Model	WP12L	WP15L	WP18SL	WP215L	WP218SL
System Type:	12" 2-way passive speaker	15" 2-way passive speaker	18" bass-reflex subwoofer	Dual 15" 2-Way passive speaker	Dual 18" High Power Subwoofer
Frequency Range (-10dB):	54Hz--20kHz	50Hz---20kHz	43Hz---1000Hz	37Hz-20kHz	27Hz-220Hz
Crossover Mode:	Full range Passive	Full range Passive	Passive	Full range Passive	Passive
Long-term Power(RMS):	250W	500W	600W	800W	900W
Power Peak:	500W	1000W	1200W	1600W	1800W
Sensetivity(1w@1m)	97dB	99dB	98dB	100dB	96dB
Maximum SPL:	128dB	130dB	129dB	134dB	134dB
LF Driver:	1x12" steel woofer 2.5" VC 50OZ	1x15" steel woofer, 3" VC 60 oz	1x18" steel subwoofer 3" VC 80 oz	2x15" steel woofer 3" VC 80 oz	2x18" steel subwoofer 3" VC 80oz
HF Driver:	1x1.35"(34mm)Titanium Compression driver	1x1.75"(44mm)Titanium compression driver	N/A	1x1.75"(44mm)Titanium compression driver	N/A
Impedance:	8 ohm	8 ohm	8 ohm	8 ohm	8 ohm
Enclosure:	18mm MDF	18mm MDF	18mm MDF	18mm MDF	18mm MDF
Finish:	Black DuraFlex finish	Black DuraFlex finish	Black DuraFlex finish	Black DuraFlex finish	Black DuraFlex finish
Dimensions:	600x395x366mm	640x375x365mm	645x605x540mm	1250x520x540mm	1080x650x620mm
Net Weight:	15kgs	30kgs	28kg	53kgs	66kgs

P11-16木音响修改.indd 13 2013-11-29 16:49:22

PRO WOODEN CABINET SPEAKERS

WP-A SERIES ACTIVE WOODEN CABINET SPEAKER

WP12AFE-BT WP15AFE-BT WP18SA WP215A-MP3 WP218SA

Model	WP12AFE-BT	WP15AFE-BT	WP18SA	WP215A-MP3	WP218SA
Features	2-Way 180W System Folder Search MP3 with USB/SD/ Bluetooth/Remote control	2-Way 300W System Folder Search MP3 with USB/SD/ Bluetooth/Remote control	300W for Subwoofer 2x150W for 2x12" Satellite speaker	2-Way 600W System Folder Search MP3 with USB/SD/Remote control	1000W Subwoofer
System Type:	12" 2-way Active speaker	15" 2-way Active speaker	18" bass-reflex subwoofer	Dual 15" 2-Way Active speaker	Dual 18" High Active Subwoofer
Frequency Range (-10dB):	54Hz-20kHz	50Hz-20kHz	43Hz-1000Hz	37Hz-20kHz	27Hz-220Hz
Crossover Mode:	Full range Active	Full range Active	Active	Full range Active	Active
Long-term Power(RMS):	180W	300W	300W	600W	1000W
Power Peak:	360W	600W	600W	1200W	2000W
Sensetivity(1w@1m)	99dB	101dB	101dB	102dB	98dB
Maximum SPL:	131dB	131dB	131dB	136dB	136dB
LF Driver:	1x12" steel woofer 2.5" VC 50OZ	1x15" steel woofer, 3" VC 60 oz	1x18" steel subwoofer 3" VC 80 oz	2x15" steel woofer 3" VC 80 oz	2x18" steel subwoofer 3" VC 80oz
HF Driver:	1x1.35"(34mm)Titanium Compression driver	1x1.75"(44mm)Titanium compression driver	N/A	1x1.75"(44mm)Titanium compression driver	N/A
Impedance:	8 ohm	8 ohm	8 ohm	8 ohm	8 ohm
Enclosure:	15mm MDF	18mm MDF	18mm MDF	18mm MDF	18mm MDF
Finish:	Black DuraFlex finish	Black DuraFlex finish	Black DuraFlex finish	Black DuraFlex finish	Black DuraFlex finish
Dimensions:	600x395x366mm	640x375x365mm	645x605x540mm	1250x520x540mm	1080x650x620mm
Net Weight:	18kgs	33.5kgs	33kg	58kgs	73kgs

P11-16木音响修改.indd 14 2013-11-29 16:49:25

PRO WOODEN CABINET SPEAKERS

APA SERIES CARPET PRO SPEAKER

Features:
Trapezoidal, black carpet-covered enclosure with dado-joined 1/2" MDF (Medium Density Fiberboard)
Full-length, black powdercoatedsteel grille
Die-cast aluminum 1-3/8" polemount cup for stand mounting

Applications:
Permanent installation PA system, portable PA system, Night clubs, live concerts

APA115L

APA215L

APA118SL

MODEL	APA115L	APA215L	APA118SL
System type	2-way Passive speaker system	2-way Passive speaker system	Passive Bass-reflex Subwoofer
Frequency	66Hz-17kHz±3dB	58Hz-17kHz±3dB	30Hz-150Hz±3dB
LF Driver	15" woofer driver 2.5" VC 50 OZ	2x15" woofer driver 2.5"VC 50 OZ	3"VC 80OZ
HF Driver	1X1.35" (34mm) Titanium compression driver	1X1.35" (34mm) Titanium compression driver	N/A
Power	300W AES,600W Program	500W AES,1000W Program	400W AES,800W Program
Sensitivity(1w/1w)	98dB	100dB	100dB
Maximum SPL	118dB	124dB	118dB
Nominal Impedance	8ohm	8ohm	8ohm
Connector	2xSpeakon	2xSpeakon	2xSpeakon
Dimensions	80.6x46.7*36.2cm	122.6x46.7x36.2cm	68.6x55.9x49.5cm
Weight	24.1kgs	35.9KGS	33.4KGS

CP-A SERIES ACTIVE WOODEN CABINET SPEAKER

CP08AU-BT

- ◆75W 8" active speaker
- ◆Bluetooth/USB/SD/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display
- ◆Track list/title

CP10AU-BT

- ◆120W 10" active speaker
- ◆Bluetooth/USB/SD/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display
- ◆Track list/title

CP12AUQ-BT

- ◆150W 12" active speaker w/side handle
- ◆Bluetooth/USB/SD/EQ/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display
- ◆Track list/title

CP15AUQ-BT

- ◆180W 15" active speaker w/side handle
- ◆Bluetooth/USB/SD/EQ/Speakon
- ◆Multiple Folder Search
- ◆FM radio/Remote Control
- ◆Dynamic LCD display
- ◆Track list/title

P11-16木音响修改.indd 15 2013-11-29 16:49:42

PRO WOODEN CABINET SPEAKERS

CP SERIES CARPET PRO SPEAKER

Features:
Sturdy 15mm flakeboard enclosure
Full-length, black carpet-covered

Applications:
Permanent installation PA system, portable PA system,
Night clubs, live concerts

CP08

CP10

CP12

CP15

CP215

CP18S

Model	CP08	CP10	CP12	CP15	CP215	CP18S
System Type:	8" 2-way passive speaker	10" 2-way passive speaker	12" 2-way passive speaker	15" 2-way passive speaker	Dual 15" 2-Way passive speaker	18" bass-reflex passive subwoofer
Frequency Range(-10dB):	55Hz-18kHz	50Hz-18kHz	48Hz-18kHz	40Hz-20kHz	58Hz-17kHz±3dB	30Hz-150Hz±3dB
Crossover Mode:	Full range Passive	Full range Passive	Full range Passive	Full range Passive	Full range Passive	Passive
Long-term Power(RMS):	100W	120W	150W	300W	500W	400W
Power Peak:	200W	240W	300W	600W	1000W	800W
Sensetivity(1w@1m)	90dB	92dB	95dB	99dB	100dB	100dB
Maximum SPL:	102dB	105dB	118dB	123dB	124dB	118dB
LF Driver:	8" woofer drive 1.0" VC 20 OZ	10" woofer drive 1.5" VC 30 OZ	12" woofer drive 2.0" VC 40 OZ	15" woofer driver 2.5" VC 50 OZ	2*15" mid-bass driver (3" VC 60 OZ)	18" SUB-BASS driver (4" VC 100 OZ)
HF Driver:	1.0" compression driver	1.0" compression driver	1.0" compression driver	1.35" compression driver	1.75" driver	N/A
Impedance:	8 ohm	8 ohm	8 ohm	8 ohm	8 ohm	8 ohm
Enclosure:	15mm Flakeboard	15mm Flakeboard	15mm Flakeboard	15mm Flakeboard	15mm Flakeboard	15mm Flakeboard
Finish:	Black carpet-covered	Black carpet-covered	Black carpet-covered	Black carpet-covered	Black carpet-covered	Black carpet-covered
Dimensions:	30x25x42	36x29.5x51.5	46x36x67cm	48x38x79cm	46x35.5x112cm	54.5x55.5x62cm
Net Weight:	5.5kgs	8.8kgs	12.8kgs	20kgs	29.75kgs	36.2kgs

P11-16木音响修改.indd 16 2013-11-29 16:49:54

COMMERCIAL SPEAKER

Model	Impedance	Woofer	Tweeter	RMS	Max	Freq.Resp.:	Sensitivity:	SIZE(mm):
RA-1107	8ohm	4"(100mm)	1"(25.4mm)	20W	40W	85Hz-20KHz	88dB	217x172x150
RA-1109	8ohm	5"(120mm)	1"(25.4mm)	20W	40W	85Hz-20KHz	88dB	245x185x165
RA-1110	8ohm	6.5"(166mm)	1"(25.4mm)	40W	80W	65Hz-20KHz	90dB	290x215x190

Model	Voltage	Woofer	Tweeter	RMS	Max	Freq.Resp.:	Sensitivity:	SIZE(mm):
RA-1107T	70V	4"(100mm)	1"(25.4mm)	20W	40W	85Hz-20KHz	88dB	217x172x150
RA-1109T	70V	5"(120mm)	1"(25.4mm)	20W	40W	85Hz-20KHz	88dB	245x185x165
RA-1110T	70V	6.5"(166mm)	1"(25.4mm)	40W	80W	65Hz-20KHz	90dB	290x215x190

Model	Impedance	Woofer	Tweeter	RMS	Max	Freq.Resp.:	Sensitivity:	SIZE(mm):
RA-1107B	8ohm	4"(100mm)	1"(25.4mm)	20W	40W	85Hz-20KHz	88dB	217x172x150
RA-1109B	8ohm	5"(120mm)	1"(25.4mm)	20W	40W	85Hz-20KHz	88dB	245x185x165
RA-1110B	8ohm	6.5"(166mm)	1"(25.4mm)	40W	80W	65Hz-20KHz	90dB	290x215x190

Model	Voltage	Woofer	Tweeter	RMS	Max	Freq.Resp.:	Sensitivity:	SIZE(mm):
RA-1107TB	70V	4"(100mm)	1"(25.4mm)	20W	40W	85Hz-20KHz	88dB	217x172x150
RA-1109TB	70V	5"(120mm)	1"(25.4mm)	20W	40W	85Hz-20KHz	88dB	245x185x165
RA-1110TB	70V	6.5"(166mm)	1"(25.4mm)	40W	80W	65Hz-20KHz	90dB	290x215x190

active

Model	Impedance	Woofer	Tweeter	RMS	Max	Freq.Resp.:	Sensitivity:	SIZE(mm):
RA-1109A	8ohm	5"(120mm)	1"(25.4mm)	40W	70W	85Hz-20KHz	88dB	245x185x165
RA-1110A	8ohm	6.5"(166mm)	1"(25.4mm)	50W	80W	65Hz-20KHz	90dB	290x215x190
RA-1109BA	8ohm	5"(120mm)	1"(25.4mm)	40W	70W	85Hz-20KHz	88dB	245x185x165
RA-1110BA	8ohm	6.5"(166mm)	1"(25.4mm)	50W	80W	65Hz-20KHz	90dB	290x215x190

1 stereo line input(RCA) with volume control
1 mic input(1/4") with volume control

color:white,black

Model	Color	Woofer	Tweeter	RMS	Max	Freq.Resp.:	Sensitivity:	SIZE(mm):
RA-1709	8ohm White	6.5"(166mm)	N/A	5/10W	25W	120Hz-15KHz	92dB	260x180x120
RA-1709T	70V White	6.5"(166mm)	N/A	5/10W	25W	120Hz-15KHz	92dB	260x180x120
RA-1709B	8ohm Black	6.5"(166mm)	N/A	5/10W	25W	120Hz-15KHz	92dB	260x180x120
RA-1709TB	70V Black	6.5"(166mm)	N/A	5/10W	25W	120Hz-15KHz	92dB	260x180x120

P17-18公共音箱.indd 17 2013-11-29 16:49:34

COMMERCIAL SPEAKER

color:white,black

Model	Color	Woofer	Tweeter	RMS	Max	Freq.Resp.:	Sensitivity:	SIZE(mm):
RA-1720	8ohm White	6.5"(166mm)	N/A	3W/6W	15W	120Hz-20KHz	92dB	217x180x80
RA-1720T	70V White	6.5"(166mm)	N/A	3W/6W	15W	120Hz-20KHz	92dB	217x180x80
RA-1720B	8ohm Black	6.5"(166mm)	N/A	3W/6W	15W	120Hz-20KHz	92dB	217x180x80
RA-1720TB	70V Black	6.5"(166mm)	N/A	3W/6W	15W	120Hz-20KHz	92dB	217x180x80

Model	Impedance	Woofer	Tweeter	RMS	Max	Freq.Resp.	Sensitivity:	SIZE(mm):
RA-2405	8ohm	4"(100mm)	1"(25.4mm)	3/6W	15W	70Hz-20KHz	90dB	215x150x130
RA-2406	8ohm	5"(120mm)	1"(25.4mm)	5/10W	25W	85Hz-20KHz	90dB	280x190x81
RA-2407	8ohm	6.5"(166mm)	1"(25.4mm)	6/12W	30W	65Hz-20KHz	89dB	205x205x195

Model	Voltage	Woofer	Tweeter	RMS	Max	Freq.Resp.	Sensitivity:	SIZE(mm):
RA-2405T	70V	4"(100mm)	1"(25.4mm)	3/6W	15W	70Hz-20KHz	90dB	215x150x130
RA-2406T	70V	5"(120mm)	1"(25.4mm)	5/10W	25W	85Hz-20KHz	90dB	280x190x81
RA-2407T	70V	6.5"(166mm)	1"(25.4mm)	6/12W	30W	65Hz-20KHz	89dB	205x205x195

Model	Impedance	Woofer	Tweeter	RMS	Max	Freq.Resp.	Sensitivity:	SIZE(mm):
RA-2408	8ohm	4"(100mm)	1"(25.4mm)	3/6W	15W	70Hz-20KHz	90dB	ϕ185x95
RA-2409	8ohm	5"(120mm)	1"(25.4mm)	5/10W	25W	85Hz-20KHz	90dB	ϕ200x102
RA-2410	8ohm	6.5"(166mm)	1"(25.4mm)	6/12W	30W	65Hz-20KHz	89dB	ϕ230x128

Model	Voltage	Woofer	Tweeter	RMS	Max	Freq.Resp.	Sensitivity:	SIZE(mm):
RA-2408T	70V	4"(100mm)	1"(25.4mm)	3/6W	15W	70Hz-20KHz	90dB	ϕ185x95
RA-2409T	70V	5"(120mm)	1"(25.4mm)	5/10W	25W	85Hz-20KHz	90dB	ϕ200x102
RA-2410T	70V	6.5"(166mm)	1"(25.4mm)	6/12W	30W	65Hz-20KHz	89dB	ϕ230x128

Model	Voltage	Impedance	Woofer	RMS	Max	Freq.Resp.	Sensitivity:	SIZE(mm):
RA-2006	70-100V	8ohm	4"(100mm)	3/6W	15W	90Hz-20KHz	89dB	ϕ185x95
RA-2008	70-100V	8ohm	5.25"(131mm)	3/6W	15W	85Hz-20KHz	90dB	ϕ200x102
RA-2010	70-100V	8ohm	6.5"(166mm)	5/10W	15W	75Hz-20KHz	90dB	ϕ230x128

Model	Impedance	Woofer	Tweeter	RMS	Max	Freq.Resp.	Sensitivity:	SIZE(mm):
RA-2708	4ohm	5.5"	0.5"	30W	60W	80Hz-18KHz	90dB	ϕ180x90

P17-18公共音箱.indd 18 2013-11-29 16:49:49

PROFESSIONAL WOOFERS&DRIVERS

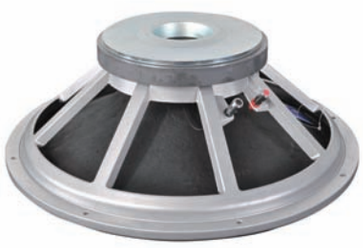

Silver Power Series

SP3120
12" Professional woofer
400W RMS/800W Peak
48-4.5KHz
96dB
125oz magnet(220x110x25)
4" Kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

SP3150
15" Professional woofer
500W RMS/1000W Peak
45-4.0KHz
98dB
125oz magnet(220x110x25)
4" Kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

SP3180
18" Professional woofer
600W RMS/1200W Peak
40-3.8KHz
100dB
125oz magnet(220x110x25)
4" Kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

RF Series

RF12
12" Professional woofer
400W RMS/800W Peak
48-4.5KHz
96dB
125oz magnet(220x110x25)
4" Kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

RF15
15" Professional woofer
500W RMS/1000W Peak
45-4.0KHz
98dB
125oz magnet(220x110x25)
4" Kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

RF18
18" Professional woofer
600W RMS/1200W Peak
40-3.8KHz
100dB
125oz magnet(220x110x25)
4" Kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

CY08006 Series

CY08126-100
12" Professional woofer
400W RMS/800W Peak
48-4.5KHz
96dB
125oz magnet(220x110x25)
4" Kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

CY08156-100
15" Professional woofer
500W RMS/1000W Peak
45-4.0KHz
98dB
125oz magnet(220x110x25)
4" Kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

CY08186-100
18" Professional woofer
600W RMS/1200W Peak
40-3.8KHz
100dB
125oz magnet(220x110x25)
4" Kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

P19-21喇叭单元.indd 19 2013-11-29 16:56:48

PROFESSIONAL WOOFERS&DRIVERS

RA(Rich Audio) Series

RA1408
8" Professional woofer
80W RMS/150W Peak
60-6.0KHz
90dB
54oz magnet(156x80x20)
2" kapton VC
8 ohm
Steel frame
Paper cone cloth edge

RA1410
10" Professional woofer
100W RMS/200W Peak
56-5.5KHz
95dB
54oz magnet(156x80x20)
2" kapton VC
8 ohm
Steel frame
Paper cone cloth edge

RA1412
12" Professional woofer
150W RMS/300W Peak
50-4.5KHz
97dB
63oz magnet(170x80x20)
2.5" kapton VC
8 ohm
Steel frame
Paper cone cloth edge

RA1415
15" Professional woofer
200W RMS/400W Peak
45-4.0KHz
98dB
79oz magnet(90x90x20)
3" kapton VC
8 ohm
Steel frame
Paper cone cloth edge

CY08001 Series

CY08101-100
10" Professional woofer
350W RMS/700W Peak
55-3KHz
95dB
80oz magnet(90x90x20)
3" Kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

CY08121-100
12" Professional woofer
400W RMS/800W Peak
48-4.5KHz
96dB
125oz magnet(220x110x25)
4" Kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

CY08151-100
15" Professional woofer
500W RMS/1000W Peak
45-4.0KHz
98dB
125oz magnet(220x110x25)
4" Kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

CY08181-100
18" Professional woofer
600W RMS/1200W Peak
40-3.8KHz
100dB
125oz magnet(220x110x25)
4" Kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

EW Series

EW0801
8" Professional woofer
80W RMS/150W Peak
60-6.0KHz
90dB
54oz magnet(156x80x20)
2" kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

EW1001
10" Professional woofer
100W RMS/200W Peak
56-5.5KHz
95dB
54oz magnet(156x80x20)
2" kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

EW1201
12" Professional woofer
150W RMS/300W Peak
50-4.5KHz
97dB
63oz magnet(170x80x20)
2.5" kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

EW1501
15" Professional woofer
200W RMS/400W Peak
45-4.0KHz
98dB
79oz magnet(90x90x20)
3" kapton VC
8 ohm
Die cast aluminum frame
Paper cone cloth edge

P19-21喇叭单元.indd 20 2013-11-29 16:56:53

PROFESSIONAL WOOFERS&DRIVERS

COMPRESSION DRIVER

CD-25
1" Titanium compression driver
25W RMS at 8 ohm
110dB
11oz magnet
600Hz-20KHz
1" VC and ferrite magnet
80x67mm and 0.74kgs

CD-72
3" Titanium compression driver
110W RMS at 8 ohm
100dB
62oz magnet
500Hz-20KHz
2.85" VC and ferrite magnet
170x68mm and 4.65kgs

CD-34
1.34" Titanium compression driver
35W RMS at 8 ohm
110dB
13oz magnet
600Hz-20KHz
1.35" VC and ferrite magnet
90x62mm and 0.91kgs

CD-100
4" Titanium compression driver
150W RMS at 8 ohm
100dB
66oz magnet
500-10KHz
3.91" VC and ferrite magnet
190*81mm and 5.6kg

CD-44
1.75" Titanium compression driver
60W RMS at 8 ohm
110dB
23oz magnet
600Hz-20KHz
1.75" VC and ferrite magnet
115x68mm and 1.65kgs

CD-100A
4" Titanium compression driver
150W RMS at 8 ohm
100dB
66oz magnet
500-10KHz
3.91" VC and ferrite magnet
190*69mm and 5.5kg

CD-51
2" Titanium compression driver
80W RMS at 8 ohm
110dB
35oz magnet
600Hz-20KHz
2" VC and ferrite magnet
134x75mm and 2.55kgs

CD-100B
4" Titanium compression driver
150W RMS at 8 ohm
100dB
66oz magnet
500-10KHz
3.91" VC and ferrite magnet
190*73mm and 5.6kg

P19-21喇叭单元.indd 21 2013-11-29 16:57:21

STUDIO MONITORS

B SERIES BOTH ACTIVE STUDIO MONITORS

FEATURES:

*Custom Glass Aramid composite cone woofers
*1" Neo soft dome tweeter with ferrofluid
*Bi-amplified w/18dB oct. filters
*Optimised directivity high frequency waveguide
*Magnetically shielded
*Slotted ports to reduce distortion
*With unbalanced RCA& balanced TRS/XLR Input
*High frequency precision adjust.

SPECIFICATIONS

MODEL	B5	B6	B8	B10S
Frequency Response	55Hz-20KHz	45Hz-20KHz	40Hz-20KHz	45Hz-160Hz
Woofer Driver	5"Aramid Glass Fiber	6.5"Aramid Glass Fiber	8"Aramid Glass Fiber	10"Aramid Glass Fiber
althorn Driver	1"Soft Dome	1"Soft Dome	1"Soft Dome	N/C
Power Rating (HF/LF) RMS	15W/35W	15W/50W	15W/75W	100W
Total Efficiency	>80%	>80%	>80%	>80%
Crossover Frequency	3KHz	2.6KHz	2.4KHz	160Hz
Subsonic Filter	45Hz	40Hz	35Hz	35Hz
Distortion	<0.1%	<0.1%	<0.1%	<0.1%
Signal to Noise Ratio	≠90dB	≠90dB	≠90dB	≠90dB
High frequency shift	-2/-1/+0/+1 dB	-2/-1/+0/+1 dB	-2/-1/+0/+1 dB	-2/-1/+0/+1 dB
balanced Impedance	10K Ohm	10K Ohm	10K Ohm	10K Ohm
Unbalanced Impedance	20K Ohm	20K Ohm	20K Ohm	20K Ohm
Temperature	65	65	65	65
RCA Input Sensitivity	250mv	250mv	250mv	110mv
TRS/XLR Input Sensitivity	400mv	400mv	400mv	210mv
Input AC Power	AC115V&230V	AC115V&230V	AC115V&230V	AC115V&230V
Dimensions (cm)	28cm x 19cm x 22.5cm	32cm x 22.5cm x 26.5 cm	38cm x 26.5cm x 30.5cm	38.2cm x 32.2cm x 39.8cm

BH4 BLUETOOTH HI-FI STUDIO MONITOR

BH-4 Features:

1. Built-in high -quality digital amplifier, RMS 30Watts each channel.
2. Uses the latest bluetooth APTX standard for best possible wireless hifi transmission.
3. Full remote control functions, all operations are easily handled with remote control.
4. Connections: AUX1, AUX1 (3.5MM), Subout, Optical (Options), to connect different sources.
5. Auto standby power: <0.5W
6. 2 Way bass reflex MDF cabinet, painting finish.

Specifications:

1. Type: Powered stereo loudspeaker system, 2 way bass reflex.
2. Amplifier: 2 x 30W
3. Tweeter: 1" soft dome
4. Woofer: 4"
5. Frequency range: 45 – 20.000Hz
6. Inputs: Bluetooth standard V4.0 + EDR with apt-X codec and 2 x Aux in (3.5 mm + RCA),
7. Outputs: SUB OUT (for Audio Pro wireless receivers only)
8. Dimensions(mm): H: 215 x W: 140 x D: 170
9. Finish: Black or white matt lacquered

P22监听音箱.indd 22 2013-11-29 16:57:10

PORTABLE PA SYSTEM

PPS2110-BT

2 x 120W Compact Portable PA System with USB/SD/bluetooth
1 x 8"woffer,1 x 1" titanium compression driver
3 channel mic/line input
1 group of tape input,tape output
Built-in USB/SD/bluetooth input
Rating power:2x120W/4ohm
Power supply:AC115V/230V(switchable)

PPS2120-BT
PPS2120-V2BT

With VHF Wireless microphone inputs on channel 1 and channel 2(switchable)

2 x 120W Compact Portable PA System with USB/SD/UHF/DSP/bluetooth
1 x 8"woffer,1 x 1" titanium compression driver
3 channel mic/line input
1 channel tape/line/blt/mp3 stereo input
1 group of tape input,tape output
2-band EQ adjust on all input channels
Built-in USB/SD/bluetooth input
Rating power:2x120W/4ohm
Power supply:AC115V/230V(switchable)

PPS2120-MP5
PPS2120-V2BT-MP5

With VHF Wireless microphone inputs on channel 1 and channel 2(switchable)

2 x 120W Compact Portable PA System with USB/SD/bluetooth
1 x 8"woffer,1 x 1" titanium compression driver
3 channel mic/line input
1 channel tape/line/blt/mp3 stereo input
1 group of tape input,tape output
2-band EQ adjust on all input channels
Built-in USB/SD/bluetooth input
Built-in MP5 function
Rating power:2x120W/4ohm
Power supply:AC115V/230V(switchable)

PPS2150-V2BT

All in one packaged 150W Bluetooth portable PA System
2 VHF wireless hand-hold microphone
1x6Ch mixer with DSP effects
Remote control, FM radio and 5 band EQ
USB/SD/with dynamic LCD screen
Folder search, track title display
2 x 10" plastic cabinet speaker
2 x 5M 1/4" speaker cable

P23-25PA音响.indd 23 2013-11-29 16:58:38

PORTABLE PA SYSTEM

PML10KIT
PMU10KIT
PMQ10KIT

Detachable Class D 300W(2x150W)10inch 2.0 active PA system
6ch Power mixer w/ Echo effects
USB/SD/LCD Track title display
4ch MIC/LINE w/ Echo and individual volume control
Each channel has on/off switch between MIC/LINE
Phantom power supply available
2-band EQ(Treble&Bass)
2 x 5M 1/4" speaker cable

PMU10KIT PML10KIT PMQ10KIT

PML15CD210-BT

Portable DJ system includes two active speaker, DJ players, wired microphone, headphone, RCA cables and stands. which offers two channels with scratch and pitch functions for optimal control and fun.

Specifications:

2 x 180W PML15A Active Speakers
1 x CDUS-210BT DJ CD Player
2 x RCA Cables YC003
1 x DM-673 microphone
1 x TS-610 headphone
1 x KS005DS Keyboard stands
2 x SPS003SL stands

CP15AUQ-BT-KIT

Portable PA system includes two active wooden speaker, two speaker stands, one speakon cable and one wired microphone
Play a USB drive full of your favorite songs with the raw power of the amplified speakers

Specifications:

2 x 180W 15" active speaker
1 x DM-673 microphone
2 x SPS003SL stands
1 x SKC201 speaker cable

PPS410L-BT
PM408A-MP3L

One piece Power Mixer 75W/4ohm, w/USB/SD/LCD/FM/ RC/Folder search
4 Mic/Line mono input channels, Tape in and Record out
Super Musical 2-band EQ for each mono input channel
Built-in Digital Delay, 5 bands EQ for main output

CP-100L

Two pieces 10" 2-way 75W wooden carpet speaker
10" heavy-duty woofer with piezo tweeter
Use as floor monitor or mounted main speakers
Two pieces 5M 1/4"-1/4" Speaker cable
One piece dynamic microphone

P23-25PA音响.indd 24 2013-11-29 17:00:07

PORTABLE PA SYSTEM

PPS612L-BT
PM608A-MP3L

One piece Powered Mixer 120W/4ohm, w/USB/SD/LCD/
FM/RC/Folder search
6 Mic/Line mono input channels, Tape in and Record out
Super Musical 2-band EQ for each mono input channel
Built-in Digital Delay, 7 bands EQ for main output

CP-120L

Two pieces 12" 2-way 120W wooden carpet speaker
12" heavy-duty woofer with piezo tweeter
Use as floor monitor or mounted main speakers
Two pieces 5M 1/4"-1/4" Speaker cable
One piece dynamic microphone

PPS815L-BT
PM808A-MP3L

One piece Powered Mixer 150W/4ohm, w/USB/SD/LCD/FM/
RC/Folder search
6 Mic/Line mono input channels, Tape in and Record out
Super Musical 2-band EQ for each mono input channel
Built-in Digital Delay, 7 bands EQ for main output

CP-150L

Two pieces 15" 2-way 150W wooden carpet speaker
15" heavy-duty woofer with piezo tweeter
Use as floor monitor or mounted main speakers
Two pieces 5M 1/4"-1/4" Speaker cable
One piece dynamic microphone

PPS715-BT
PM740-MP3

One piece Powered Mixer 2x250W/4ohm, with MP3/USB/SD
16 types of digital effects, Tape in and Record out
7 Mic/Line input channels(Channels 5-7 support stereo line inputs)
3-band EQ for each input channel, Dual 7-band graphic EQ for both
main&Monitor
Digital Effect output for external signal processing, Turn on delay,
Protection of over-thermal
and short curcuit and zero offset

CP-152

Two pieces 15" 2-way 250W wooden carpet speaker
15" heavy-duty woofer with piezo tweeter
Use as floor monitor or mounted main speakers
Two pieces 5M 1/4"-1/4" Speaker cable
One piece dynamic microphone

P23-25PA音响.indd 25 2013-11-29 17:01:45

DJ Controllers

Professional China dj controller with CD/SD/USB/MP3

CDSD-7000

Features:

★Blue Backlight LCD Display.
★Single/Continuous Play
★Replay Play
★Direct Track Access Buttons
★Mini plug input for use with MP3(MP3 player not included)
★Eject Button,Repeat,Program
★Time Selection,Loop Function
★Channel1&2 Fader
★Channel1&2 GAIN CONTROLS
★LED VU Meter,Device Input Selector
★Mic&Cue Volume Level Control
★Cue Function,Play/Pause Button
★EQ Controls,Fader Start,Crossfader
★Master Volume Control,1/4' Headphone Jack

Specifications:

★Frequency response: 20Hz - 20kHz
★S/N Ratio:(-65dB)
★Oversampling Rate: 8x
★Sampling frequency 44.1 kHz
★Harmonic Distortion:0.1%
★Load impedance:more than 47k ohms
★Speed edge(pitch):(+/-12%)
★Dynamic:80 dB,Cross Talk:60dB
★Lineal quantification:24bits
★Power Supply:110-230V AC 25W

Packing material Description:

★QTY per master carton:2
★Unit dimensions in mm:482 x 260 x 122mm(W x D x H)

Professional DJ Player with Bluetooth/MIDI/CD function

CDUS-210BT

Description:

★Large LCD display with blue back light
★2 x CD drive
★2 x USB
★MP3 Play back
★MIDI Mode
★Loop and re-loop function
★Jog mode:pitch,bend,scratch,search
★2 x XLR outputs
★2 channel mixer,fader,start control
★Inputs:microphone(jack/XLR),headphones.

Packing material Description:

★QTY per master carton:2
★Unit dimensions in mm:482 x 266 x 81mm(W x D x H)
★Unit N.W. In kg:6.3
★Giftbox dimensions in mm:572 x 392 x 175
★Giftbox/shipping weight in kg:12.6
★MCP dimensions in mm:576 x 396 x 365

P26-29DJ产品.indd 26 2013-11-29 16:57:17

DJ Controllers

Professional midi controller

DMD-800

Features:

★Including everything you need to DJ with your computer
★Large scratch wheels for natural scratch feel
★Crossfader enables you to mix between songs
★Perfect your sound with bass and treble controls
★Easy-to-use Mixvibes DJ software included
★Plug-and-play USB connection requires no drivers or power adapter

NEW

Packing material Description:

★QTY per master carton:10
★Unit dimensions in mm:480 x 210 x 41mm(W x D x H)
★Unit N.W. In kg:0.95
★Giftbox dimensions in mm:467 x 215 x 95
★Giftbox/shipping weight in kg:1.4
★MCP dimensions in mm:478 x 445 x 490
★MCP weight in kg:14.4

Professional China DJ Equipment with USB MIDI Controller

MCU-2500

Description:

★Large platters for accurate control and scratching.
★2 DECK layout with complete mixer.
★Traditional mixer/CD Player layout for quick and easy access.
★USB MIDI controller compatible with all DJ midi software.
★Low latency audio driver included for MAC and PC.
★2 Large Touch-Sensitive Jog wheels.
★Built-in audio driver included for MAC and PC.
★Built-in audio connections for both preview and master outputs.
★Large knobs for direct access to filter.
★DJ Software for MAC/PC includes Virtual DJ LE.
★2-channel switchable line/phono with volume control.
★XLR and 1/4" mic input with mic volume control.

NEW

Packing material Description:

★QTY per master carton:2
★Unit dimensions in mm:476 x 245 x 91mm(W x D x H))
★Unit N.W. In kg:6.8
★Giftbox dimensions in mm:536 x 285 x 150
★Giftbox/shipping weight in kg:7.4
★MCP dimensions in mm:550 x 300 x 350
★MCP weight in kg:14.8

P26-29DJ产品.indd 27 2013-11-29 16:57:32

DJ Controllers

Professional dj midi controller with built-in sound card

MIDI-8800

Description:

★Professional 2 channel USB midi controller with built-in sound card
★Offer 2 kinds power (5v) ways supply: DC IN USB connect to the computer
★Rocker switch selection for phone/line
★Balanced out control for master output
★3 signal output options: master, REC and booth
★With touch jog wheel
★90 parameters of various software are assignable to the MIDI-7 control section via USB transmitted midi signals.
★2 selectable jog mode, operations such as pitch bending
★scanning and scratching can be performed with speed and accuracy.
★Every cross fader motion of the MIDI-7 is digitally converted and sent to the software, curve settings are generated with the built-in CPU, which allows you to adjust the cross fader control.
★The MIDI-7 provided simple plug & play working with apple and windows operating system computers.
★Compatible with all software that allows MIDI control assignment.

Packing material Description:

★QTY per master carton:5
★Unit dimensions in mm:360 x 260 x 74mm(W x D x H)
★Unit N.W. In kg:1.75
★Giftbox dimensions in mm:412 x 312 x 117
★Giftbox/shipping weight in kg:2.3
★MCP dimensions in mm:640 x 420 x 320
★MCP weight in kg:12.9

Professional small dj midi player

DMD-1000

Specifications:

★Large platters for accurate control and scratching.
★Traditional mixer/CD Player layout for quick and easy access.
★USB MIDI Controller compatible with all DJ midi software.
★2 Large Touch-Sensitive Jog Wheels.
★Built-in audio driver includedfor MAC and PC.
★Includes everything you need to DJ with your computer.
★Large scratch wheels for natural scratch feel.
★Crossfader enables you to mix between songs.
★Perfect your sound with Bass and Treble controls.
★Easy-to-use MixVibes DJ software included.
★Plug-and-play USB connection requires no drivers or power adapter.

Packing material Description:

★QTY per master carton:10
★Unit dimensions inmm:300 x 110 x 46mm(W x D x H)
★Unit N.W. In kg:1.2
★Giftbox dimensions in mm:370 x 160 x 100
★Giftbox/shipping weight in kg:1.5
★MCP dimensions in mm:375 x 205 x 820
★MCP weight in kg:15.4

P26-29DJ产品.indd 28 2013-11-29 16:57:50

DJ Controllers

Professional USB/SD media player with Mixing Station

MSD-5
Features:
★USB input/output recording computer
★Scratch and brake, reverse DSP effect
★Two universal SD CARD and Two universal USB port
★Supports multi-partitions for external hard disks(FAT16/32)
★Full viewing direction display with ID3 TAG
★SD card /USB/Photo/Line/Mic input
★Pitch V.R adjusts the desired speed
★Control function : play/pause, stop, cue, skip+/-, search +/-, time, single/continue, brake, reverse, loop reloop (in & out), Pitch+/-(16%),jog(searching +/-)
★Single/continuous play mode
★CUE on and off switch for each channel
★Assign able crossfader .
★2 channel RCA master output &2 channel REC output .

Specifications:
★Pitch Band :±16%
★Bass(channels 1-2):+/-12dB
★High(channels 1-2):+/-12dB
★Gain(channels 1-2):0 to -20dB
★Headphone Impedance :32 ohm
★Frequency Response :20Hz-20KHz
★Distortion :<0.1%
★S/N Ration :>80dB
★Channel Separation :55dB(1KHz)
★EQ Control (2 BAND):±12dB
★Power Supply :AC 100--240V,60/50Hz

Professional dj controller turntables with USB and SD

TT-402
Features:

★Support for both 33 1/3,45 and 78 RPM playback speeds.
★USB Output for REC function compatible with Windows XP or MAC OS9.1.
★Static balanced S-shaped tonearm with detachable headshell.
★Aluminium diecast turntable platter
★Phono and line output.
★Double soft touch the start/Stop button
★Fully adjustable balance cone.
★High quality audio sampling rate.
★Forward and reverse mode.
★Plate input socket so you can convert other music source,

Packing material Description:
★QTY per master carton:2
★Unit dimensions in mm:480 x 135 x 370mm(W x D x H)
★Unit N.W. In kg:3.9
★Giftbox dimensions in mm:522 x 457 x 188
★Giftbox/shipping weight in kg:4.7
★MCP dimensions in mm:532 x 466 x 395
★MCP weight in kg:9.8

P26-29DJ产品.indd 29 2013-11-29 16:58:02

PROFESSIONAL AUDIO MIXER

AMX series mixers

★6/8/10/12 channels mixers
★with an MP3 player/recorder of outstanding sound quality, and a group of stereo input channels.
★6/8/10/12/16 channels to meet the usage requirements of different occasions, and raise its performance price ratio.

Model	Channel	USB Interface	Dimensions(mm)	Box sizes(mm)
AMX-6MUS	4M/4S	YES	329x390x53	405x530x130
AMX-8MUS	4M/8S	YES	437x390x53	510x530x130
AMX-12MUS	4M/12S	YES	545x390x53	620x530x130
AMX-16MUS	4M/16S	YES	663x376x74	782x450x580

M SERIES MIXER

Feature:
★8 channel mono inputs+2 stereo inputs, 6 channels mono inputs+ 2 stereo inputs, 4 channels mono inputs+ 2 stereo inputs,
★7-band graphic equalizer
★2 aux send/returns, 2 main channels/2 subgroup outputs
★48V phanton power
★Support MP3, SD card, LCD display

Model	CHANNEL
M206	4 Mono/2 Stereo
M208	6 Mono/2 Stereo
M210	8 Mono/2 Stereo
M206A	4 Mono/2 Stereo 250W x 2
M208A	6 Mono/2 Stereo 250W x 2
M210A	8 Mono/2 Stereo 400W x 2

M210

M210A

P30-37调音台.indd 30 2013-11-29 16:57:33

PROFESSIONAL AUDIO MIXER

X SERIES MIXERS

★Premium 24-Input 4/2-Bus Mixer with Mic Preamps & Compressors, British EQs, 24-Bit Multi-FX Processor, USB/Audio Interface
★Premium ultra-low noise, high headroom analog mixer
★10 state-of-the-art, phantom-powered Mic Preamps comparable to stand-alone boutique preamps
★8 studio-grade compressors with super-easy "one-knob" functionality and control LED for professional vocal and instrumental sound .
★Neo-classic "British" 3-band EQs with semi-parametric mid band for warm and musical sound Studio-grade FX processor with 16 editable presets including reverb, chorus, flanger, delay, pitch shifter, multi-effects, Tap function and storable user parameter settings
★Builtin stereo USB/Audio Interface to connect directly to your computer. Free audio recording, editing and podcasting software plus 150 instrument/effect plug-ins and ultra-low latency driver included
★Channel inserts and direct outputs on each mono channel plus main mix inserts for flexible connection of outboard equipment
★4 aux sends per channel: 2 pre/post fader switchable for monitoring/FX applications, 2 post fader
★High-quality components and exceptionally rugged construction ensure long life
★Rack mount brackets included for ultimate flexibility
★Long-wearing 60-mm logarithmic-taper faders and sealed rotary controls
★"Planet Earth" switching power supply for maximum flexibility (100 - 240 V~), noise-free audio, superior transient response plus low power consumption for energy saving

Model	Channel	Box sizes(mm)
X1204USB	12	405x375x315
X1222USB	16	470x410x315
X1622USB	16	430x420x315
X1832USB	18	535x440x315
X2222USB	22	535x440x315
X2442USB	24	535x525x435

NEW

X1204USB

X1222USB

X1622USB

X1832USB

X2222USB

X2442USB

P30-37调音台.indd 31 2013-11-29 16:58:17

PROFESSIONAL AUDIO MIXER

MINI MIXERS
PM-60MP3
★4ch Mini Mixer with USB input
★4 mic in & 1 line out

PM-60A-MP3
★4ch Mini Mixer with USB/ SD/LCD/Folder search/RC
★4 mic in & 1 line out

PM-120MP3
★8ch Mini Mixer with USB input
★8 mic in & 2 line out

PM-120A-MP3
★8ch Mini Mixer with USB/ SD/LCD/Folder search/RC
★8 mic in & 2 line out

MM-14FX
★Mini Mixer with Echo effects
★4ch balanced inputs with individual Volume Control
★9V internal battery or external 9V DC power supply

MM-14FX-MP3
★Mini Mixer with Echo effects
★4ch balanced inputs with individual Volume Control
★9V internal battery or external 9V DC power supply

ME-502
★5 channels Mini Mixer

ME-602
★6 channels Mini Mixer

ME-602

ME-502

MM-5
★5 channel Mini Mixer
★XLR input - Channel 1
★2*1/4" inputs - Channel 2 & 3
★RCA inputs - Channel 4 & 5
★Individual volume controls for channels 1-3
★Single combined volume control for channel 4-5
★1/4" mono or RCA stereo output
★Powered by 12V DC Power Adapter (included)
★Heavy Duty Metal Construction

colour available: 1 2 3 4 5

MM602MU
★Easy to carry and operate, ideal gear for you
★With built-in MP3 player, direct insert a USB driver for a signal source
★2 mono input channels and 2 stereo input channels
★2-band frequency equalizer for each input channel
★Adopt low-noise discrete Mic pre-amplifier on microphone inputs
★Independently 2 channels input and record output
★Flexible headphone monitor output
★Peak indicator on each mono channel
★Provide +48V phantom power for condenser microphone
★built-in digital effects processor provides 16 kinds of effect
★built-in MP3 player with USB and SD port
★Use JAPAN ROHM decode IC, has a patent Licensing

P30-37调音台.indd 32 2013-11-29 16:58:57

PROFESSIONAL POWERED MIXER

FLAT POWER MIXER
Professional USB power mixer

MODEL	Power
USB-700	(250W+250W 4OHM)
USB-900	(300W+300W 4OHM)
USB-1200	(350W+350W 4OHM)

★Built-in USB automatically recognize MP3 player
★5/7/9 Mono Input channel with silver plated XLRs and balanced line inputs.
★1 stereo input channels with balanced TRS jacks
★Ultra-musical 3-band EQ on all channels and 2x7 band EQ on all main output.
★1 Aux Send per channel for external effects .
★Highly accurate 10 segment Barograph Meters.
★16 level Digital delay of the effect system inside.
★2-Track REC output , 1 stereo headphone output. 1 Stereo Main (line) output.
★Power Voltage: 115V or (220V)230V

XR800F/XR1200F

★8/10 low-noise, low Z preamps★6/8 high Z mic/line inputs
★Precision 60 mm channel and master faders
★3-band EQ★Channel clipping LEDs
★Channel stereo pan controls★Monitor send
★EFX send★3 stereo line inputs
★16-bit audio/32-bit internal precision, DSP stereo reverb/effects with 2 parameter controls
★Two 9-band graphic EQs with patented FLS® Feedback Locating System :Selectable 48 V phantom power
★Dual seven-segment master level meters
★Protected stereo/Main-monitor mode switch
★2X210 W @ 4 ohms internal power amplifier 420 W @ 8 ohms in bridge mode
★Dimensions :Unpacked: 8.00 in. H x 17.50 in. W x 16.00 in. D
★Weight: 34.00 lbs.

XR800FN/XR1200FN

★WITH COVER

PM1300USB

★9 Channels 1300W(2X650W/4ohm) Powered mixer
★build in flight case
★USB player / LCD screen/ 7band EQ/ 48V phantom power

P30-37调音台.indd 33 2013-11-29 16:59:37

PROFESSIONAL POWERED MIXER

CABINET POWER MIXER

★4 channels powered mixer
★4 mic/line mono input channels
★Built-in remote controlled MP3 USB/SD Player
★FM radio/Bluetooth
★ Song name display dynamic LCD screen

PM408A-MP3L-BT-75W
PM408A-MP3L-BT-120W
PM408A-MP3L-BT-150W

★6 channels powered mixer
★6 mic/line mono input channels
★Built-in remote controlled MP3 USB/SD Player
★5 band EQ for main output and FM radio/Bluetooth
★ Song name display dynamic LCD screen

PM608A-MP3L-BT-75W
PM608A-MP3L-BT-120W
PM608A-MP3L-BT-150W

★8 channels powered mixer
★8 mic/line mono input channels
★Built-in remote controlled MP3 USB/SD Player
★5 band EQ for main output and FM radio/Bluetooth
★Song name display dynamic LCD screen

PM808A-MP3L-BT-75W
PM808A-MP3L-BT-120W
PM808A-MP3L-BT-150W

PM409 \ PM609 \ PM809
4/6/8 Channel Powered Mixer

★4/6/8 mic/line mono input channels
★Rated output power: 150W/4Ω
★Built-in Digital Delay
★Record output
★Super musical 2-band EQ at each input mono channels
★Tape in and record out for CD or tape player
★Two 1/4" phone jacks for speaker connection

PM409

PM409-MP3

PM409A-MP3-BT

MODEL	POWER	NO. CHANNELS	FEATURES
PM409	150W	4	EQ/ECHO
PM609	150W	6	
PM809	150W	8	
PM409-MP3	150W	4	USB/SD/EQ/ECHO
PM609-MP3	150W	6	
PM809-MP3	150W	8	
PM409A-MP3-BT	150W	4	USB/SD/LCD dynamic screen/ Track title display/EQ/ECHO/ FM Radio/Remote Control/ Folder Search/Bluetooth
PM609A-MP3-BT	150W	6	
PM809A-MP3-BT	150W	8	

RACK-MOUNT STYLE

PM409A-MP3R-BT
PM609A-MP3R-BT
PM809A-MP3R-BT

P30-37调音台.indd 34 2013-11-29 17:00:25

PROFESSIONAL POWERED MIXER

Professional 7 Channel 2x250W Powered Mixer with DSP effects
PM740

★Built-in 250W+250W/4Ω amplifier for Main L/R or Main/Monitor or Main only(bridged mono 500W @ 4Ω)
★16 types of digital effects allow the user to add reverb or ambiance to the mix
★7 input channels compatible with mic/line level (channels 5-7 accept stereo line inputs)
★Pad control on channels 1-4
★3-band EQ on each input channel
★Dual 7-band graphic equalizers with In/Out switches for Main L/R or Main/Monitor
★+48V phantom power for all mic input connectors
★Effect out for external signal processing
★One AUX input
★Tape in and out allows for connection of a tape/CD Player
★Rec out with trim control for record level matching
★Monitor and effect sends on each input channel
★Mains power switchable between 115 VAC and 230 VAC

PM740-MP3
★Build-in MP3 USB/SD Player

PM740A-MP3-BT
★Build-in remote controlled USB/SD Player
★Song name display dynamic LCD screen

PM780A-MP3-BT/7100A-MP3-BT
500Watts 8/10-Channel Powered Mixer with MP3 and Stereo input

★6/8 channels MIC/line mono input
★2 channels line stereo input with Left and Right volume control
★3-band EQ on each input channel
★Dual 7-band stereo graphic equalizers
★Built in remote controlled MP3 player with USB/SD
★Track title display dynamic LCD screen
★Folder search for USB/SD
★Built-in DSP processor with 99 effects
★Tape in/out for connecting to Radio/CD Player without take up a main input
★Switch between MP3 and tape input
★Turn on delay, protection of over-thermal, short circuit and zero offset
★Power: 2x250W/4ohm @ working mode: Main + Main; Main + Monitor; Main (Bridged :500W/8ohm)
★Power supply: AC115/230V selectable

Professional 10 Channel 2x250W Powered Mixer with DSP effects
PM1062FX-MP3-BT

★Built-in 250W+250W/4ohm Amplifier, can be selected as Main+Main, Main+Monitor or Main Only(Bridged operation,500W/4ohm)
★24 bit 99 DSP Effects★One AUX input
★9 balanced mic inputs and 6 line inputs (Channel 10 accept USB/iPod input)
★6 Super Hi-Z inputs optimized for direct instrument input
★Pad control on channels 1-6★3-band EQ on each input Channel
★7-band Graphic Equalizers available for both main and monitor mixer
★+48V phantom power for all mic input connectors
★Tape in and out allows for connection of a tape/CD Player
★Effect out master control to the input of built-in effect processor
★Monitor and effect sends on each input channel
★Turn on delay protects over-thermal,short circuit and zero offset
★Mains power switchable between 115 VAC and 230 VAC

P30-37调音台.indd 35 2013-11-29 17:01:03

PROFESSIONAL DJ MIXER

Professional 5 Channel DJ Mixer with USB/SD Player
MIX-5USD
Features & Specifications:

★4+1 channel professional mixer
★One universal SD card and one universal USB port.
★Supports multi-partitions for external hard disks(FAT 16/32).
★Full viewing direction display with ID3 TAG.
★SD card/USB/Phono/Line/Mic input.
★Pitch V.R adjust the desired speed.
★Control function:play/pause,stop,cue,skip+/-,
search+/-,time,single/continue,brake,reverse,loop reloop(in & out),
pitch+/-(16%),jog(searching+/-).
★Single/continuous play mode
★CUE on and off switch for each channel.
★Assign able crossfader.
★Headphone Monitor Split.
★Cross Fader Curve: Choose from three types of cross fader start-up option.
★Talk Over: Mutes -14db all levels apart from the microphone.
★Outputs:2 Master(Master 1:XLR,Master 2:RCA),1 Rec:RCA,Booth Output:RCA.
★Inputs:2 phono:RCA,4 Line:RCA,1 USB,1 SD,1 Mic:XLR,1 CD:RCA
★Frequency range:20 Hz-20 kHz.
★S/N ratio:80 dB.
★Distortion:0.05%

MIX-5DSP

★DSP Effect: (Flanger, Flange-Verb, Phaser,Robot-Flange
Random-Pitch, Soft Scratch, Delay, Trans,
Small hall, Large hall, Small Room, Medium Room,
Thin Plate, Plate, Spring Verb, Gate Reverb)

DJX-3
★3 Channel Professional DJ Mixer★10" Rack
★1 Mic, 3 Phono, 3 Line★VAAT Talkover
★Individual Cue★Individual Low, Mid, High
★Master, Booth, Rec Outs ★Booth, Cue & Master Controls
★XLR Balanced & Unbalanced RCA
★Removable Alpha Railglide
★Crossfader★Cue/Prog Slide Control
★3 Line, 3 Phono RCA Inputs
★XLR/Jack Combo Mic
★Alpha Slide Controls
★Bal, L + R Volume Control
★8 Dual Segment Bright LEDs

DJX-3

DJX-3USB

DJX-3USB
★3 Channel Professional DJ Mixer with MP3

P30-37调音台.indd 36 2013-11-29 17:01:39

PROFESSIONAL DJ MIXER

DJ-302USB-B

★3 ch DJ Mixer with USB
★2 Mic input ,2ch stereo input ,Talkover,Crossfader,Monitor output
★12V DC
★switch for monitor

SDMX-3

★3Channels DJ Mixer Product details:
★Built-in USB Player
★3+1 channel professional mixer
★Headphone Monitor Split.
★Cross Fader Curve: Choose from two types of cross fader start-up option.
★Talk Over: Mutes -14db all levels apart from the microphone.
★Independent Monitor Switch: Enables independent or simultaneous monitoring of each CH.
★Gain control with 3-fold sound control(+12/-24dB)per channel.
★Mic channel 1 with 3-fold sound control(+12/-12dB),Gain, Cue & talk-over.
★Ultra high-performance headphones out 1-way equalizer Cue-Master-Mix.
★Outputs:2 Master(Master 1:XLR,Master 2:RCA),1 Rec:RCA,Booth Output,Fader Start Jack.
★Inputs:1 phono:RCAx1,2 Line:RCAx2,Mic:JACK.
★Freuency range:20 Hz-20 kHz.
★S/N ratio:80 dB.
★Distortion:0.05%
★Dimensions:W290*D226*H117MM.

DM-200U
DM-200UB
2 channel professional USB mixer

★USB in/out (USB 1.1 and SUB 2.0 compatible)
★2 + 1 channel professional mixer
★1 USB input/output for Computer Playing and Recording
★Headphone monitor auditioning
★Reinforced headphone 1×1/4 jack & 1×1/8 jack output
★Independent Monitor Switch: Enables independent monitoring of each CH
★Inputs: 2 Line inputs, 2 Turntable inputs, 1 Mic: JACK, 1 USB
★Outputs: 2 Maser, 2 Rec

Specifications:

★Frequency range: 20 Hz – 20 kHz
★S/N ratio: 80dB. (Line)
★Distortion: 0.05%
★Power supply: PC USB DC5V 500mA or USB adaptor
★Dimensions: (L)150×(W)129×(H)50mm

DM-200UB
BLACK COLOR

DM-200U
SILVER COLOR

P30-37调音台.indd 37 2013-11-29 17:02:09

PROFESSIONAL POWER AMPLIFIER

Class AB&H Power Amplifier V Series

FEATURES:

★SMD processed PCB★Noise-free★LED indicator
★Motorola bit power metal encapsulation triode,
★Built-in multiple wise protection systems
★Built-in current limiter(crowbar)protection
★Excellent timbre ★Dual-speed fans

SPECIFICATIONS:

★Input impedance: 20KΩ★Freq. Resp.: 4Hz-50KHz
★THD: 0.05%★Slew rate: 40V/usec★Hum&Noise: 103dB
★Radiator:High/Low Automatism Control
★Safeguard:DC Safeguard/out Overloading/Chancroid Startup/Boot-Strap Short Test

Characteristic	V2.0	V3.0	V4.0	V5.0	V6.0	V8.0	V10	V12
Stereo Mode								
Out Power (8Ω)	2x200W	2x300W	2x400W	2x500W	2x600W	2x800W	2x1000W	2x1200W
Out Power(4Ω)	2x350W	2x500W	2x700W	2x850W	2x1050W	2x1350W	2x1700W	2x1900W
Out Power(2Ω)	2x500W	2x800W	2x1000W	2x1300W	2x1400W	2x1800W	2x2200W	2x2400W
BRIDGE Mode								
Out Power 8Ω)	650W	1000W	1250W	1460W	1750W	2300W	2900W	3000W
Out Power 4Ω)	950W	1300W	1700W	1920W	2300W	2900W	3800W	4000W
N.W./G.W.(Kgs)	18.5/20	21/22.5	22.5/24	23/24.5	25/26.5	26/27.5	32/35	33/36
Dimensions(mm)	482×383×88.8			482x381x88.8			482x481x132	

TD Series

FEATURES:

★4ch Ultra high power switching power supply amplifier ★All channels bridgeable to 2 or 3 channels configuration
★Lo-Z or Hi-Z(70V/100V)--Selectable per channel ,normal or bridge★Efficient and uniform intercooler cooling
★Voltage Peak Limiter(VPL)--Configurable per channel to optimize each output connected loads
★Comprehensive protection and warning--Excessive output current, DC, high temperature, very high frequency(VHF),short circuit, open load, mains fuse protection and soft start ★PC long distance control by using the attached software

SPECIFICATIONS:

★Input impedance: 20KΩ
★Freq. Resp.: 4Hz-50KHz
★THD: 0.05%
★Slew rate: 40V/usec
★Hum&Noise: 103dB
★Radiator:High/Low Automatism Control
★Safeguard:DC Safeguard/out Overloading/Chancroid Startup/Boot-Strap Short Test

Characteristic	TD-8800AP	TD-6800AP	TD-4800AP	TD-2800AP
Peak total output all channels driven	8800W	6800W	4800W	2800W
Stereo Mode				
Out Power(8Ω)	4x1250W	4x1200W	4x1000W	4x700W
Out Power(4Ω)	4x2100W	4x1700W	4x1200W	4x700W
Out Power(2Ω)	4x2200W	4x1200W	4x600W	4x300W
BRIDGE Mode				
Out Power 16Ω)	2500W	2400W	2000W	1400W
Out Power 8Ω)	4200W	3400W	2400W	1200W
Out Power 4Ω)	4600W	2400W	1200W	600W
N.W.(kgs)	12kgs(26.4lbs)			
Dimensions(mm)	483x88x343mm(2U)			

P38-43功放.indd 38 2013-11-29 16:57:32

PROFESSIONAL POWER AMPLIFIER

Class H Power Amplifier MH Series

FEATURES:

★MH series power amplifier use particular THE MIRRORED FRONTED POWER SUPPLY BRIDGE to make the symmetrical circuit design. It can make more less distortion and better sound, but cost more higher.
★With power auto switch system, power parallel connection in low power, increase the output current. And the voltage will auto increase in big power to increase the output power.
★It have input power supply filter, make the capability of anti-jamming more strong.
★Amplifier circuit with shield cover, add shield ring in transformer to make less noise, let the product have more clear sound.
★Independence close cooling wind path to make the cooling more fast, even use for long time will be very clear.
★Have perfect protect function, power on amortize, delay connect speaker, limited function, over-current protect, overheat protect, short-cut protect and output DC protect etc.

Characteristic	MH3200	MH5200	MH7200	MH8200	MH9200	MH9400
Stereo Mode						
Out Power(8Ω)	2×400W	2×600W	2×800W	2×1000W	2×1200W	2×1400W
Out Power(4Ω)	2×650W	2×950W	2×1300W	2×1600W	2×1800W	2×2100W
Out Power(2Ω)	2×950W	2×1400W	2×1900W	2×2400W	2×2700W	2×3000W
BRIDGE Mode						
Out Power 8Ω)	1300W	1900W	2600W	3200W	3600W	4200W
Out Power (4Ω)	1900W	2800W	3800W	4800W	5400W	6000W
OutPut Circuit Type	Class H	Class H	Class H	Class H	Class H	Class H
Input Impedance	20KΩ					
Frequency Response	20Hz~20KHz					
THD	0.0005					
Slew Rate	80V/usec					
Hum and Noise	103dB					
Damp Modulus	＞500					
Radiator	High/Low Automatism Corlrol					
Suteguard	DC Safeguard/out Overloading/Chancroid Sgartup/Boot-Strap Short Test					
N.W./G.W.(Kgs)	23.5/26					
Dimensions(mm)	482×443.5×88.8					
Power Range	(115V/230V)Can offer different voltage according client's requirement					

P38-43功放.indd 39 2013-11-29 16:57:39

PROFESSIONAL POWER AMPLIFIER

HI Series 3 Channel Professional Power Amplifier

★Include one subwoofer channel and 2 main channels
★High power enough for subwoofer channel to met lots of difference requirement
★Ensure your performance more professional ,convenient and freely
★All the other features same as our other analog power amplifiers

Hi-250

Characteristic	Hi-250	Hi-350	Hi-3
Out Power (8Ω)	250W+250W+500W	350W+350W+700W	350W+350W+700W
Out Power (4Ω)	400W+400W+800W	550W+550W+1000W	550W+550W+1000W
Crossover Point	50～250Hz	50～250Hz	50～250Hz
Height	2U	2U	3U

Hi-3

MC Series 4 Channel Professional Power Amplifier

★Inner four high quality amplifiers in one Power Amplifier
★it has reasonable structure
★can meet the occasion which need multi-channels.

MC-4200

Characteristic	MC-4200	MC-4250	MC-4300	MC-4350	MC-4400
Out Power(8Ω)	4×200W	4×250W	4×300W	4×350W	4×400W
Out Power(4Ω)	4×300W	4×370W	4×450W	4×500W	4×600W
Out Power(2Ω)	4×400W	4×480W	4×580W	4×650W	4×780W
OutPut Circuit Type	Class AB	Class AB	Class AB	Class AB	Class AB
Input Impedance	20KΩ				
Frequency Response	5Hz~50KHz				
THD	0.05%				
Slew Rate	40V/usec				
Hum and Noise	103dB				
Damp Modulus	>400				
Radiator	High/Low Automatism Control				
Suteguard	DC Safeguard/out Overloading/Chancroid Sgartup/Boot-Strap Short Test				
N Weight (Kg)	22	22.5	23.5	24.8	26.2
Dimension	482×439.5×88.8				
Power Range	(115V/230V)Can offer different voltage according client's requirement				

P38-43功放.indd 40 2013-11-29 16:57:41

PROFESSIONAL POWER AMPLIFIER

MX Series PROFESSIONAL POWER AMPLIFIER

FEATURES:

★Professional stereo power amplifier★Operating mode: stereo, parallel and bridged
★XLR balanced inputs★Protection:over heating over load, short circuit , turn on delay
★Indicator:peak, signal, fault ★Temperature-controlled variable speed fan forcooling
★3 types output signal compressor :(20x40x0.755x)

Characteristic	MX-4	MX-6	MX-8
Stereo Mode			
Out Power(8Ω)	2x100W	2x150W	2x220W
Out Power(4Ω)	2x170W	2x220W	2x350W
Out Power(2Ω)	2x200W	2x260W	2x530W
BRIDGE Mode			
Out Power 8Ω)	215W	400W	650W
Out Power 4Ω)	400W	600W	1200W
Dimensions(mm)	482x255x88		482x410x88

PQ Series Professional Stereo Power Amplifier

NEW

★Stereo, bridge and parallel mode
★Variable speed fan cooling
★Soft stat, progressive volume control by digital potentiometer
★DC,over load, over heating,short circuit and clip limit protection
★Clip,signal, protect,bridge mode and parallel mode LED indicators
★XLR-F balanced input, XLR-M balanced output
★Two red and black Binding posts,NL4 SPEAKON
★LCD screen display:attenuating level of volume control, operating temperature,general maintenance method,malfunction type

Characteristic	PQ1500	PQ2500	PQ3360	PQ4400	PQ5200
Stereo Mode					
Out Power (8Ω)	2x320W	2x590W	2x820W	2x1100W	2x1200W
Out Power (4Ω)	2x530W	2x980W	2x1400W	2x1800W	2x2200W
Out Power (2Ω)	2x750W	2x1000W	2x1680W	2x2200W	2x2600W
BRIDGE Mode					
Out Power (8Ω)	1000W	2000W	2800W	3600W	4400W
Out Power (4Ω)	1500W	2500W	3360W	4400W	5200W

PC Series Professional Stereo Power Amplifier

NEW

★Stereo, bridge and parallel mode
★Variable speed fan cooling
★Soft stat, progressive volume control by digital potentiometer
★DC,over load, over heating,short circuit and clip limit protection
★Clip,signal, protect,bridge mode and parallel mode LED indicators
★XLR-F balanced input, XLR-M balanced output
★Two red and black Binding posts,NL4 SPEAKON

Characteristic	PC1500	PC2500	PC3360	PC4400	PC5200
Stereo Mode					
Out Power (8Ω)	2x320W	2x590W	2x820W	2x1100W	2x1200W
Out Power (4Ω)	2x530W	2x980W	2x1400W	2x1800W	2x2200W
Out Power (2Ω)	2x750W	2x1000W	2x1680W	2x2200W	2x2600W
BRIDGE Mode					
Out Power (8Ω)	1000W	2000W	2800W	3600W	4400W
Out Power (4Ω)	1500W	2500W	3360W	4400W	5200W

P38-43功放.indd 41 2013-11-29 16:58:09

PROFESSIONAL POWER AMPLIFIER

X series LCD Power Amplifier

FEATURES:

★Use particular THE MIRRORED FRONTED POWER SUPPLY BRIDGE to make the symmetrical circuit design.It can make more less distortion and better sound, but cost more higher.
★With power auto switch system, power parallel connection in low power, increase the output current. And the voltage will auto increase in big power to increase the output power.
★It have input power supply filter, make the capability of anti-jamming more strong.
★Amplifier circuit with shield cover, add shield ring in transformer to make less noise, let the product have more clear sound.
★Independence close cooling wind path to make the cooling more fast, even use for long time will be very clear.
★Have perfect protect function, power on amortize, delay connect speaker, limited function, over-current protect, over-heat protect, short-cut protect and output DC protect etc.

Characteristic	X-400	X-600	X-800	X-1000	X-1200	X-1400
Out Power(8Ω)	2×400W	2×600W	2×800W	2×1000W	2×1200W	2×1400W
Out Power(4Ω)	2×650W	2×950W	2×1300W	2×1600W	2×1800W	2×2100W
Out Power(2Ω)	2×950W	2×1400W	2×1900W	2×2400W	2×2700W	2×3000W
Out Power (BRIDGE) (8Ω)	1300W	1900W	2600W	3200W	3600W	4200W
Out Power (BRIDGE) (4Ω)	1900W	2800W	3800W	4800W	5400W	6000W
OutPut Circuit Type	Class H	Class H	Class H	Class H	Class H	Class H
Input Impedance	20KΩ					
Frequency Response	20Hz~20KHz					
THD	0.05%					
Slew Rate	80V/usec					
Hum and Noise	103dB					
Damp Modulus	>500					
Radiator	High/Low Automatism Control					
Suteguard	DC Safeguard/out Overloading/Chancroid Sgartup/Boot-Strap Short Test					
N Weight/G Weight(Kg)	23.5/26	26/28.5	27/29.5	33/36	34/37	35.5/38.5
Dimension	482×453×88.8			482×468×132		
Power Range	(115V/230V)Can offer different voltage according client's requirement					

P38-43功放.indd 42 2013-11-29 16:58:10

PROFESSIONAL POWER AMPLIFIER

Karaoke Mixing Amplifiers

KTVA-9898

FEARURES:

★Remote control/AM/FM
★7 Band Graphic Equalizer
★4 Mic Inputs with Individual Volume Control
★Digital Echo Control
★Fan Cooling System
★USB/SD easier music source
★Digital display
★High Mid and Bass for Vocal Mix

KTVA-2100U

FEATURES:

★Remote control/AM/FM
★7 Band Graphic Equalizer
★2 Mic Inputs with Individual Volume Control
★Echo Control
★Fan Cooling System
★USB easier music source
★Digital dynamic display

KTVA-420D

FEATURES:

★4 Mic Inputs with Individual Volume Control
★Digital Echo Control
★Fan Cooling System
★USB/SD easier music source
★High Mid and Bass for Vocal Mix

KTVA-420C

FEATURES:

★5 Mic Inputs with Individual Volume Control
★Digital Echo Control
★Fan Cooling System
★USB/SD easier music source
★High Mid and Bass for Vocal Mix
★2x9 Band Graphic Equalizer

SPECIFICATIONS:

Characteristic	KTVA-9898	KTVA-2100U	KTVA-420D	KTVA-420C
Power consumption	300W	100W	300W	300W
Output power	2x80W	2x35W	2x80W	2x80W
Input impedance	47K	47K	47K	47K
Input sensitivity	300mv	300mv	300mv	300mv
THD	≤0.5%	≤0.5%	≤0.5%	≤0.5%
Frequency Response	20-20KHz	20-20KHz	20-20KHz	20-20KHz
Treble	±10dB	±10dB	±10dB	±10dB
Bass	±10dB	±10dB	±10dB	±10dB
Input	USB/SD	USB	USB/SD	USB/SD

P38-43功放.indd 43 2013-11-29 16:58:12

MICROPHONES

PROFESSIONAL VHF DUAL CHANNELS WIRELESS MICROPHONE

MA-V338

Frequency Range:VHF220MHz-270MHz Transistor
Modulafion Mode:FM
Frequency Stability:±5KHz
Dynamic Range:>90dB
Frequency Response:50Hz-17KHz
F/N Ratio:>90dB
Service Areas:>50M
T.H.D:<1%
S/N Ratio:>85dB

Professional 4 channel microphone wireless

UHF-408

4 Replaceable Receiver/Transmitter Modules
4 microphone output with individual Volume controls
UHF band quartz lock for drift free operation
Receiver power/RF/AF&Microphone low battery indicators
Front Antenna provides clear RF Reception
4 individual XLR Mic outputs and one 1/4" Mixed output

Transmitter(Handheld):

Transmitter power:30mW
Spurious emission:<40dB(with carrier)
Display:LED
Battery voltage:1.5V x 2
Battery life:8 hours

NEW

Receiver:

Carrier Wave Frequency Range: UHF-600-870MHz
Oscillation Mode: Quartz Controlled Fixed Frequency
Carrier Wave Stability:10PPM
Sensitivity:-105dB (at) sinad=12 dB
S/N Ratio:>105dB
T.H.D.:<0.5% (at) 1KHz
Image rejection:85 dB typical
Spurious rejection:75 dB typical
Frequency Responses:40Hz~18KHz
Working distance:200 feet
Squelch Control:dual-squelch circuit
AF Output Impedance:2.2KΩ
Max.Output Level:Balance:0-400mv,Unbalance:0-200mv
Display:LED
Power Supply:External DC Power Supply,0.8A,12~18V DC
Output Connector:4 XLR Balanced Socket Unbalance TRs 6.35mm Socket
Dimensions (m/m): 420(L)×45(H)×220(D) , Weights (Kg): 3.8

Professional dual uhf wireless microphone

NEW

UHF-271

Features:

Desktop receiver and enhanced muting,high signal/noise ratio.
Desktop receiver supports both balance & unbalance Audio output.
Almost zero noise output when on standby.
Broad frequency response range super low distoration.
No impact on switching receiver,ensure safety of rear stage amplifier system and speaker.
Perfect operative status signals,fluorescence display,with digital microphone
Long practical distance .Over 30m in ideal circumstance,20m radius in complex circumstances
Dual frequency design that allows two mics to be used at the same time without interference.
Morden audio compandor return your tone quality extremely.

P44-48麦克风.indd 44 2013-11-29 16:58:17

MICROPHONES

UHF WIRELESS MICROPHONE

Features:
Equiped with SMT technology
UHF band quartz lock for drift free operation

Specifications:
Carrier Wave Frequency Range: UHF-600-870MHz
Oscillation Mode: Quartz Controlled Fixed Frequency
Switching Bandwidth: 24MHz
Sensitivity: -105dB @ sinad=12dB
S/N Ratio: >105dB
T.H.D.: <0.5% @ 1 KHz
Frequency Responses: 50Hz~18KHz ± 1dB

Transmitter(handheld):
Transmitter power: 30mW
Spurious emission:<40dB
Battery:AA x 2
Current drain: <100mA

UHF-817
Single UHF quartz controlled ideal for home entertainment system

UHF-585
Dual UHF quartz controlled ideal for home entertainment system

PROFESSIONAL UHF WIRELESS MICROPHONE

Feature:
SMT
FIXED FREQUENCY
AVAILABLE FOR LAVALIAR & HEADSET

Specification:
Carrier Wave Frequency Range: UHF 614~814MHz
Oscillation Mode: Quartz Controlled Fixed Frequency
Carrier Wave Stability: 10PPM
Sensitivity: -105dB @ sinad=12 dB
S/N Ratio: >105dB
T.H.D.: <0.5% @ 1KHz
Image rejection: 85 dB typical
Spurious rejection: 75 dB typical
Frequency Responses: 40Hz~18KHz
Working distance:200 feet
Squelch Control:dual-squelch circuit
AF Output Impedance:2.2KΩ
Max. Output Level: Balance : 0—400mv, Unbalance : 0—200mv
Display:LED
Power Supply: External DC Power Supply, 0.35A, 12~18V DC
Output Connector: 2 XLR Balanced Socket Unbalance TRs⊙6.35mm Socket
Dimensions (m/m): 200(L)×40(H)×155(D) Weights (Kg): 2.1

Transmitter(handheld):
Transmitter power: 30mW
Spurious emission: <40dB(with carrier)
Display:LED
Battery voltage: 1.5v×2
Battery life: 10 hours

UHF-13 (single microphone)
Packing information:
N.W:13.5KGS G.W:15KGS
Measurement:71 x 42 x 38CM
10PCS IN A CARTON

UHF-113 (dual microphone)
Packing information:
N.W:16.5KGS G.W:18KGS
Measurement:71 x 42 x 38CM
10PCS IN A CARTON

P44-48麦克风.indd 45 2013-11-29 16:58:18

MICROPHONES

UHF WIRELESS MICROPHONE

UHF-108

Features:

8 CHANNEL TUNABLE
IR SYNC
AUTO FREQUENCY SELECTION
SINGLE DIVERSITY
SMT

Specifications:

Description:Single diversity,LED display,Sync IR
Frequency Band:UHF
Receiver:Dual channel PCB module receiver
Carrier Frequency:600-870MHz
Frequency Steadying: Phase Locked Loop (PLL)
F/N Ratio: 80dB
P/N Ratio: 80dB
Audio Output: 1/4", 3-pin XLR
Power: DC 12V/400mA

Transmitter:

Modulation Mode: FM
Adjustment Depth: 35 KHz (Max)
Transmitting Power: ≤10dBm
RF Squelch: >50dB
Battery: AA x 2

System:

Audio frequency response: 50-16000Hz
S/N Ratio: >100dB
T.H.D: >0.8%
Cover Range: 100M(Outdoor)

Packing information:

N.W:11KGS G.W:12.5KGS
Measurement:54.5 x 33.5 x 46CM
5PCS IN A CARTON

UHF WIRELESS MICROPHONE

UHF-272

Features:

Single UHF quartz controlled ideal for home entertainment system
Equiped with SMT technology
UHF band quartz lock for drift free operation

Specifications:

Receiver:

Carrier Wave Frequency Range: UHF-600-870MHz
Oscillation Mode: Quartz Controlled Fixed Frequency
Carrier Wave Stability:10PPM
Sensitivity:-105dB @ sinad=12 dB
S/N Ratio:>105dB
T.H.D.:<0.5% @ 1KHz
Image rejection:85 dB typical
Spurious rejection:75 dB typical
Frequency Responses:40Hz~18KHz
Working distance:200 feet
Squelch Control:dual-squelch circuit
AF Output Impedance:2.2KΩ
Max.Output Level:Balance:0-400mv,Unbalance:0-200mv
Display:LCD
Power Supply:External DC Power Supply,0.5A,12~18V DC
Output Connector:2 XLR Balanced Socket Unbalance TRs ⊙6.35mm Socket
Dimensions (m/m): 420(L)×45(H)×195(D) Weights (Kg): 2.1

P44-48麦克风.indd 46 2013-11-29 16:58:22

MICROPHONES

UHF PLL WIRELESS MICROPHONE

UHF-111

Features:

UHF PLL Wireless Microphone System
Switchable,16 Channels per Microphone
Microphone and Receiver Channels Auto-Sync via Infrared
Two High Sensitive Microphone with LCD Indicators
Noise Reduction Technology
Uni-Directional Rechargeable Battery Design
Rack Mountable(2 Machines are Needed to fit rack-mount)

Specifications:

Receiver:

Carrier Wave Frequency Range:UHF 600-870MHz
Oscillation Mode:Phase-locked Loop controlled
Carrier Wave Stability:10PPM
Sensitivity:-105dB @ sinad=12 dB
S/N Ratio:>105dB
T.H.D.:<0.5% @ 1KHz
Image rejection:85 dB typical
Spurious rejection:75 dB typical
Frequency Responses:40Hz~18KHz
Working distance:200 feet
Squelch Control:dual-squelch circuit
AF Output Impedance:2.2KΩ
Max.Output Level:Balance:0-400mv,Unbalance:0-200mv
Display:LCD
Power Supply:External DC Power Supply,0.5A,12~18V DC
Output Connector:1 XLR Balanced Socket Unbalance TRs ⊙6.35mm Socket

Transmitter(handheld):

Transmitter power:30mW
Spurious emission:<40dB
Battery:AA x 2
Current drain:<130 mA

UHF PLL WIRELESS MICROPHONE

UHF-265

Features:

UHF PLL Wireless Microphone System
Switchable,16 Channels per Microphone
Microphone and Receiver Channels Auto-Sync via Infrared
Two High Sensitive Microphone with LCD Indicators
Noise Reduction Technology
Uni-Directional Rechargeable Battery Design
Rack Mountable(2 Machines are Needed to fit rack-mount)

Specifications:

Receiver:

Carrier Wave Frequency Range:UHF 600-870MHz
Oscillation Mode:Phase-locked Loop controlled
Carrier Wave Stability:10PPM
Sensitivity:-105dB @ sinad=12 dB
S/N Ratio:>105dB, T.H.D.:<0.5% @ 1KHz
Image rejection:85 dB typical
Spurious rejection:75 dB typical
Frequency Responses:40Hz~18KHz
Working distance:200 feet
Squelch Control:dual-squelch circuit
AF Output Impedance:2.2KΩ
Max.Output Level:Balance:0-400mv,Unbalance:0-200mv
Display:LCD
Power Supply:External DC Power Supply,0.5A,12~18V DC
Output Connector:1 XLR Balanced Socket Unbalance TRs ⊙6.35mm Socket
Dimensions (m/m): 420(L)×45(H)×195(D), Weights (Kg): 2.1

Transmitter(handheld):

Transmitter power:30mW
Spurious emission:<40dB
Battery:AA x 2
Current drain:<120 mA

P44-48麦克风.indd 47 2013-11-29 16:58:23

MICROPHONES

WIRED DYNAMIC MICROPHONE

Heavy-duty metal handle
Element: Moving Coil Dynamic
Directivity:Uni-directivity
Frequency Response:50-14000Hz
Senitivity:-74dB±3dB
Impedance:600Ω±30%

DM-266 DM-299 DM-448 DM-468 DM-580 DM-581

DM-582 DM-673 DM-806 DM-835 DM-959 DM-990

DJ HEADPHONE

MD-680

Comfortable sturdy headphones for DJ use and personal listening.
Delivering the highest level performance.
Frequency Response: 20~22,000Hz
Impedance: 32 Ohms ± 15%
Sensitivity(S.P.L): 108dB±3dB/mW(at 1KHz)
Maximum Power Input: 100mW
Driver Diameter: Ø 50mm
Plug: Ø3.5mm
Cord Length: 2m

MD-850

Comfortable sturdy headphones for DJ use and personal listening.
Delivering the highest level performance.
Input: Mini plug with two screw-on 1/4" adapters
Frequency Response: 20~22,000Hz
Impedance: 32 Ohms ± 15%
Sensitivity(S.P.L): 110dB±3dB/mW(at 1KHz)
Maximum Power Input: 100mW
Driver Diameter: 50mm
Plug: Ø3.5mm + Ø 6.3mm adaptor
Cord Length: 2m

Guitar Bug Wireless Receiver-Transmitter GBR1000/GBT1000

Specifications:
Carrier frequency range: 710MHZ to 865MHZ
Modulation: FM
Audio bandwidth: 40 to 20 KHZ
THD: 0.8%typ.
Signal/noise ratio: 103dB(A)typ
Power supply: single 1.5V AAA size battery
Thereore output: 5mW typ(ERP)

P44-48麦克风.indd 48 2013-11-29 16:58:30

PROCESSORS

CL-166XL

SC-234XL

PROFESSIONAL DUAL CHANNEL COMPRESSOR LIMITER WITH GATE

CL-166XL

Have Auto-Limited function.
Exact linear amplify.Special small noise.
Have smooth limited and renew characteristic, suitable to high requirement user.

Specifications:

Gain Adjustment Range	Varible;-20dB to+20dB
Dynamic Range	>115dB
Operating Voltage	100 VAC 50/60Hz;120VAC 60Hz
Power Consumption	15 Watts Maximum
Dimensions (HxWxD)	4.45cm×48.2cm×17.15cm
Weight	5.05lb(2.29Kg)

PROFESSIONAL 2-WAY STEREO/3-WAY STEREO/4-WAY MONO CROSSOVER

SC-234XL

24dB/ 2 or 3 ways stereo/4-ways mono crossover
low noise, Nicety frequency point
With 3 difference way frequency division
Can match difference system's requirement

Specifications:

Bandwidth: 20Hz - 20KHz, +0/-0.5dB
Frequency Response: <3Hz - >90kHz,+0/-3dB
S/N Ref: +4dBu, 22kHz Measurement bandwidth

Phase invert	Red LED per output(3 per channel)
perting voltage	110V/60Hz-230V/50Hz selectable
Power consumption	15W
Dimension(WxHxD)	482x44.5x146mm
Net weight	2.5kgs

EQ-215A

EQ-231A

Professional double 15-band stereo graphic equalizer with 2/3 oct.

EQ-215A

Optional range for boosting and attenuating: +/-12dB or +/-6dB.
Fixed Q character.
Optional low cut filter. Optional bypass mode.
5 segment LED level indicator.
Max output level: +20dB/+26dB (balanced)
Total harmonic distortion: 0.05%
Signal noise ratio: 96dB
Low cut filter: 80Hz 12dB/oct
L/R mix output function of 30Hz~200Hz continuously-adjusting low pass filter.
SIZE:482X195X44.4
"Dual 15-Band EQ With Sub Crossover Out"

Professional double 31-band stereo graphic equalizer with 1/3 oct.

EQ-231A

Optional range for boosting and attenuating: +/-12dB or +/-6dB Fixed Q character.
Optional low cut filter. Optional bypass mode.
5 segment LED level indicator.
Max output level: +20dB/+26dB (balanced)
Total harmonic distortion: 0.05%
Signal noise ratio: 96dB
Low cut filter: 80Hz 12dB/oct
L/R mix output function of 30Hz~200Hz continuously-adjusting low pass filter.
SIZE:482X142X88.8
"Dual 31-Band EQ With Sub Crossover Out"

P49-53周边.indd 49 2013-11-29 16:58:13

PROCESSORS

Dual 31-Band Graphic Equalizer

EQ-3102
2 channels of 31-band 1/3-octave EQ, a tunable high-pass filter circuit (8Hz to 200Hz), a switch-selectable cut or boost of either 6dB or 15dB.

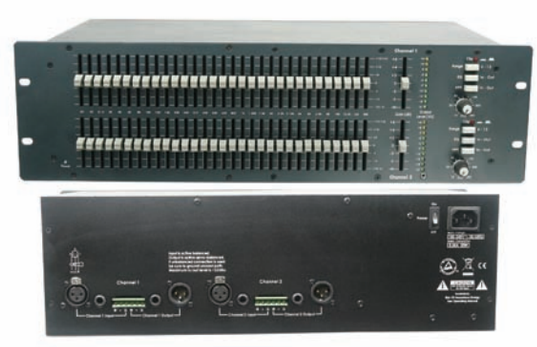

EQ-3102

Features:
Switchable-Tunable Low-Cut Filter
10 Position, 2 Color LED Level Meter plus Peak LED Indicators
Balanced XLR, 1/4", and Barrier Strip Inputs
Servo-Balanced XLR, 1/4", and Barrier Strip Outputs
significantly quiet without the need for noise reduction to be built into the equalizer circuit

Specifications:
Frequency response: 10 Hz to 35k Hz , +/-3dB
Noise: >92.3dBu, unweighted, 22Hz to 22kHz
THD: 0.004% typ. @ +4dBu, 1kHz, gain 1
Crosstalk: < -85dBu, 22Hz to 22kHz
Main voltages: 110-120V or 220-230V AC 50/60Hz
DIMENSION: 48.5 X 14.5 X 8.8 CM
WEIGHT: 2.6KG

Applications:
monitor systems; front of house sound systems;
installations requiring fixed EQ;
recording/broadcast studios; DJ systems

19" rack-mount professional high-precision 2-way mono/3-way stereo crossover with separate sub-woofer output

CX223

Features:
World-class performance 24dB per octave Linkwitz-Riley filters
Absolutely flat summed amplitude response, zero phase difference
Separate sub-woofer section with independent frequency control.
Individual output level controls for all bands
Individual phase reverse switches for instant phase correction
Switchable 40Hz low filter on each input for low-frequency driver protection
servo-balanced, XLR connectors for all inputs and outputs.
Ultra low-noise audio operational T1084 amplifiers for outstanding sound performance
High-quality components and exceptionally rugged construction for long life and reliability
Dimensions: approx 44.5mmx482.6mmx217mm
Weight: approx 3Kg

Input:
Connectors: XLR
Type: Electronically servo-balanced, HF filtered
Impedance: >50 Kohm @ balanced, >25 Kohm @ unbalanced
Max input level: +22dB
CMRR:>40dB(typical), >55dB@1KHz

CX223

Outputs:
Connectors: XLR
Electronically servo-balanced, HF filtered
Impedance: 200ohm @ balanced , 100ohm @ unbalanced
Max output level+20dB @ unbalanced, +26dB @ balanced

P49-53周边.indd 50 2013-11-29 16:58:14

PROCESSORS

PROFESSIONAL DSP SPEAKER PROCESSOR

DSP-2X4 2 input 4 output
DSP-2X6 2 input 6 output
DSP-4X8 4 input 8 output

Professional 24bit DSP digital speaker processor with 2 input and 4 output
Key-Press function:

1/ X-Over: Enter high-pass low-pass adjust(useful when adjust output channel, inefficacy when adjust input channel)
2/ Eq: Enter equalizer adjust.
3/ Dynamics: Enter limiter adjust(useful when adjust output channel, inefficacy when adjust input channel)
4/ Polarity: Phase position choosen
5/ Gain: gain and input channel choose key (useful when adjust output channel, inefficacy when adjust input channel)
6/ Delay: Enter delay function
7/ Load: Transfer saved program.
8/ Save: Save revision program
9/ System: System setup
10/ MUTE/EDIT:Mute or Edit(press shortly enter mute function, red light display.press longest enter edit function, green light display.)
11/ Enter/Setup

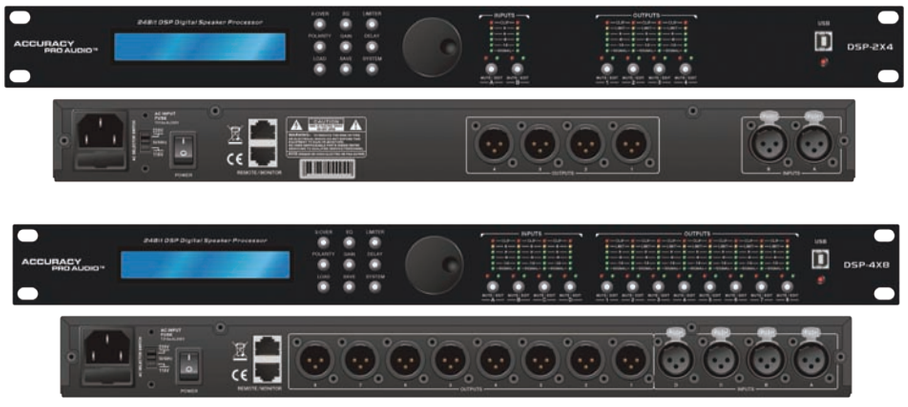

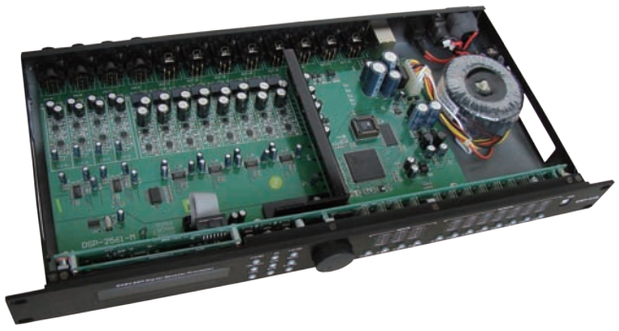

P49-53周边.indd 51 2013-11-29 16:58:22

PROCESSORS

EQ-2231
Broadcast class professional equalizer

Revolutionary Activates Noise Reduction,
with limiter and 40Hz low cut.
High Signal-to-Noise till 102dB, suitable to
high requirement user.

Power Supply

Operating Voltage:	100VAC 50/60Hz, 120VAC 60Hz;230VAC 50/60Hz
Mains Connection:	28W

Physical

Dimensions:	5.25"H×19"W×7.9"D (134x483x201mm)
Weight:	10.6lbs. (4.8Kg)

SPECIFICATIONS:
Inputs

Connectors:	1/4″ TRS,female XLR(pin 2 hot),and barrler terminal strip
Type:	Electronically balanced/unbalanced,RF filtered
Impedance:	Balanced 40KΩ,unbalanced 20KΩ
Max Input Level:	＞＋21dBu,balanced or unbalanced
CMRR:	＞40dB,typically ＞55dB at 1KHz

Outputs

Connectors:	1/4″ TRS,male XLR(pin 2 hot),and barrler terminal strip
Type:	Balanced/unbalanced,RF filtered
Impedance:	Balanced 120Ω,unbalanced 60Ω
Max Output Level:	＞＋21dBu,balanced/unbalanced into 2KΩ or greater ＞＋18dBm,balanced/unbalanced (into 600Ω)

System Performance

Bandwidth:	20Hz to 20KHz, ＋0.5/－1dB
Frequency Response:	＜10Hz to＞50KHz,＋0.5/－3dB
Noise Reduction In:	(＋/－6 and ＋/－15dB range):
Signal-to-Noise:	>100dB,unweighted,ref:＋4dBu,22KHz measurement bandwidth
Dynamic Range:	＞118dB,unweighted
Noise Reduction Out:	(＋/－6dB range):
Signal-to-Noise:	＞94dB,unweighted,ref:＋4dBu,22KHz measurement bandwidth
Dynamic Range:	＞112dB,unweighted
Noise Reduction Out:	(＋/－15dB range):
Signal-to-Noise:	＞90dB,unweighted,ref:＋4dBu,22KHz measurement bandwidth
Dynamic Range:	＞108dB,unweighted
THD＋Noise:	＜0.04%,0.02%typical at ＋4dBu,1KHz ＜0.5%, at 1KHz with 15dB gain reduction
Interchannel Crosstalk:	＜－80dB,20Hz to 20KHz (2215/2231)
Noise Reduction:	Up to 20dB of dynamic broadband noise reduction

PC-110

· Larger easy to access buttons
· A/C power center designed to eliminate
extension cords and messy wires
· 10 lighted switches on front panel
· 15A resetable circuit breaker on front panel
· 10 grounded AC sockets on rear of the unit
· Ideal for switching lights and sound equipment
· 1 rack mount space

P49-53周边.indd 52 2013-11-29 16:58:32

PROCESSORS

PRO DIRECT BOX/DI BOX

DB-01
Professional passive direct box
Instrument input: 50K unbalanced TRS jack
Parallel(link) out: 50K unbalanced TRS jack
Balanced output: 600balanced XLR jack
Frequency Response: (0dB,-20dB,-40dB) switchable
Ground lift: switchable ground lift
All metal construction with rubber feet
Dimension: 120x77x45mm
Convert your HI-Z signal to LO-Z XLR.no need a battery or phantom power. Great for Keyboardists,Guitarists, Bassists, and other instrumentalists needing to plug into the snake on stage. Ground lift switch and 2 levels of padding.
Suitable for the most demanding of situations in both live and recording applications.
Provides very high sound quality and the maximum possible rejection of external electrical interference, such as dimmer buzz.

DB-02
Professional passive dual channel direct box
Equals to 2 DB-01

DB-05
Single DI Box with one 1/4" and XLR input ; one XLR output
Converts your hi-z input to lo-z to make your signal-to-noise ratio as low as possible.
Ground lift switch and 2 levels of padding.

colour available: 1 2 3 4 5

DB-06
Dual channel DI box with two 1/4" input and one XLR output each channel

colour available: 1 2 3 4 5

DB-07A
Active battery powered direct box
1/4" and XLR input
XLR output
1/4" parallel output
Ground Lift Switch
Pad Switch (-20dB and -40dB)
Powered by 9V battery (included)
Heavy Duty Metal Construction

colour available: 1 2 3 4 5

PHANTOM
Phantom Power Supply
Perfect solution for powering your condenser microphones when phantom power is not available from the mixer
2 XLR inputs; 2 XLR outputs; Power Switch; On/Off Switch
Voltage Switch (+12V or +48V)
Powered by 12V DC Power Adapter (included)
Heavy Duty Metal Construction

colour available: 1 2 3 4 5

P49-53周边.indd 53 2013-11-29 17:00:25

PATCH SNAKE CABLES

Molded color-coded 1/4" TS male to male patch snake cable

PS02

MODEL	CONFIGURATIONS	O.D.(mm)
PS02-4CH-5M	4x1/4"(M)/4x1/4"(M)	12
PS02-8CH-5M	8x1/4"(M)/8x1/4"(M)	13
PS02-12CH-5M	12x1/4"(M)/12x1/4"(M)	15
PS02-16CH-5M	16x1/4"(M)/16x1/4"(M)	18

Number-coded 3-Pin XLR male to female patch snake cable

PS03

MODEL	CONFIGURATIONS	O.D.(mm)
PS03-4CH-5M	4xXLR(M)/4xXLR(F)	12
PS03-8CH-5M	8xXLR(M)/8xXLR(F)	13
PS03-12CH-5M	12xXLR(M)/12xXLR(F)	15
PS03-16CH-5M	16xXLR(M)/16xXLR(F)	18

Molded color-coded RCA male to male patch snake cable

PS04

MODEL	CONFIGURATIONS	O.D.(mm)
PS04-4CH-5M	4xRCA(M)/4xRCA(M)	12
PS04-8CH-5M	8xRCA(M)/8xRCA(M)	13
PS04-12CH-5M	12xRCA(M)/12xRCA(M)	15
PS04-16CH-5M	16xRCA(M)/16xRCA(M)	18

Molded color-coded 1/4" TRS male to male patch snake cable

PS06

MODEL	CONFIGURATIONS	O.D.(mm)
PS06-4CH-5M	4x1/4"(S)/4x1/4"(S)	12
PS06-8CH-5M	8x1/4"(S)/8x1/4"(S)	13
PS06-12CH-5M	12x1/4"(S)/12x1/4"(S)	15
PS06-16CH-5M	16x1/4"(S)/16x1/4"(S)	18

Molded color-coded 1/4" TRS male to male patch snake cable

BS06

8/10ch SUB snake W/ 1/4" TRS returns	8ch&10ch SUB snake NO returns
BS06-0602Q-5M	BS06-0800-5M
BS06-0602Q-10M	BS06-0800-10M
BS06-1002Q-5M	BS06-1200-5M
BS06-1002Q-10M	BS06-1200-10M

BS08

8ch stage box snake without returns

Heavy-duty metal construction

Sturdy XLR connectors

Durable wire with stain relief

Lengthes available:

BS08-5M

BS08-10M

P54-56蛇线修改.indd 54 2013-11-29 16:58:41

BOX SNAKE CABLES

BS01RB

BS02RB

BS01 XLR returns	BS02 XLR returns	Channels	Sends	Returns	Length
BS01RB-0603X-30M	BS02RB-0603X-30M	9	6	3	30
BS01RB-0804X-30M	BS02RB-0804X-30M	12	8	4	30
BS01RB-1204X-30M	BS02RB-1204X-30M	16	12	4	30
BS01RB-1604X-30M	BS02RB-1604X-30M	20	16	4	30
BS01RB-2004X-30M	BS02RB-2004X-30M	24	20	4	30
BS01RB-2404X-30M	BS02RB-2404X-30M	28	24	4	30
BS01RB-3208X-30M	BS02RB-3208X-30M	40	32	8	30

REMARK:

BS01RB BS02RB:HEAT SHRINK TUBE IN RED AND BLUE
BS01 BS02:HEAT SHRINK TUBE IN BLACK

BS10

BS10 XLR returns	Channels	Sends	Returns	Length
BS10-0603X-30M	9	6	3	30
BS10-0804X-30M	12	8	4	30
BS10-1204X-30M	16	12	4	30
BS10-1604X-30M	20	16	4	30
BS10-2004X-30M	24	20	4	30
BS10-2404X-30M	28	24	4	30
BS10-2804X-30M	40	32	8	30

Stage box splitter snakes

Splitter snakes are designed to send identical source signals to two mixing consoles. These are commonly used for onstage monitoring or recording needs.

22 Gauge Conductors
100% shielding on all channels
Heavy duty, flexible PVC jacketing
Formed steel enclosure
Sturdy XLR and 1/4" TRS returns

MODEL	MAIN CHANNELS				MONITOR OUT	
	Channels	Sends	Returns	Length(M)	Channels	Length(M)
BSS16X8-30/M16-10	24	16	8	30	16	10
BSS24X8-30/M24-10	32	24	8	30	24	10
BSS32X8-30/M32-10	40	32	8	30	32	10
BSS40X8-30/M40-10	48	40	8	30	40	10

P54-56蛇线修改.indd 55 2013-11-29 16:58:47

REEL SNAKE CABLES

RS01 SERIES

RS05 SERIES

RS01 XLR returns	RS05 XLR returns	Channels	Sends	Returns	Length
RS01-1604X-30M	RS05-1604X-30M	20	16	4	30
RS01-2404X-30M	RS05-2404X-30M	28	24	4	30
RS01-3208X-30M	RS05-3208X-30M	40	32	8	30

RSS SERIES SPLITTER SNAKE ON A ROLLING REEL

"Splitter snakes are designed to send identical source signals" to two mixing consoles. These are commonly used for onstage monitoring or recording needs.
22 Gauge Conductors ;Sturdy XLR returns
100% shielding on all channels
Heavy duty, flexible PVC jacketing

MODEL	MAIN CHANNELS				MONITOR OUT	
	Channels	Sends	Returns	Length(M)	Channels	Length(M)
RSS16X8-30/M16-10	24	16	8	30	16	10
RSS24X8-30/M24-10	32	24	8	30	24	10
RSS32X8-30/M32-10	40	32	8	30	32	10

MINI REEL SNAKE

RS06-04X-10M
RS06-06X-10M
RS06-08X-10M

RS07-04X-10M
RS07-06X-10M
RS07-08X-10M

P54-56蛇线修改.indd 56 2013-11-29 16:58:51

INSTRUMENT CABLES

20*0.12+64*0.12 OD:6.5mm	1/4"to 1/4" OFC instrument cable
	IC013-10FT
	IC013-15FT
	IC013-20FT
	IC013-25FT

20*0.12+64*0.12 OD:6.5mm	Right angle to 1/4" OFC instrument cables
	IC023-10FT
	IC023-15FT
	IC023-20FT
	IC023-25FT

20*0.12+64*0.12 OD:6.5mm	1/4"to 1/4" OFC instrument cable
	IC061-10FT
	IC061-15FT
	IC061-20FT
	IC061-25FT

20*0.12+64*0.12 OD:6.5mm	1/4"to 1/4" OFC instrument cable
	IC068-10FT
	IC068-10FT
	IC068-20FT
	IC068-25FT

20*0.12+64*0.12 OD:6.5mm	1/4"to 1/4" OFC instrument cable
	IC037-10FT
	IC037-15FT
	IC037-20FT
	IC037-25FT

20*0.12+64*0.12 OD:6.5mm	1/4"to 1/4" OFC instrument cable
	IC039-10FT
	IC039-15FT
	IC039-20FT
	IC039-25FT

20*0.12+64*0.12 OD:6.0mm	1/4"to 1/4" OFC instrument cable
	IC049-10FT
	IC049-15FT
	IC049-20FT
	IC049-25FT

20*0.12+64*0.12 OD:6.0mm	1/4"to 1/4" OFC Shrink tube instrument cable
	IC051-10FT
	IC051-15FT
	IC051-20FT
	IC051-25FT

20*0.12+64*0.12 OD:6.0mm	Right angle to Right angle OFC instrument cables
	IC053-10FT
	IC053-15FT
	IC053-20FT
	IC053-25FT

20*0.12+64*0.12 OD:6.0mm	1/4"to 1/4" OFC Injection Molded instrument cable
	IC054-10FT
	IC054-15FT
	IC054-20FT
	IC054-25FT

20*0.12+64*0.12 OD:6.0mm	Right angle to 1/4" OFC instrument cables
	IC065-10FT
	IC065-15FT
	IC065-20FT
	IC065-25FT

20*0.12+16*7*0.12 OD:7.0mm	Right angle to 1/4" OFC instrument cables
	IC064GR-10FT
	IC064GR-15FT
	IC064GR-20FT
	IC064GR-25FT

P57-62线修改.indd 57 2013-11-29 16:58:55

MICROPHONE CABLES

(28*0.10)*2+84*0.10 OD:6.0mm	3P XLR(M) to 3P XLR(F) OFC microphone cables
	MC041-10FT
	MC041-15FT
	MC041-20FT
	MC041-25FT

(28*0.10)*2+84*0.10 OD:6.0mm	3P XLR(M) to 3P XLR(F) OFC microphone cables
	MC042-10FT
	MC042-15FT
	MC042-20FT
	MC042-25FT

(28*0.10)*2+84*0.10 OD:6.0mm	3P XLR(M) to 3P XLR(F) OFC microphone cables
	MC024-10FT
	MC024-15FT
	MC024-20FT
	MC024-25FT

(28*0.10)*2+84*0.10 OD:6.0mm	1/4" TRS to 3P XLR(F) OFC microphone cables
	MC074-10FT
	MC074-15FT
	MC074-20FT
	MC074-25FT

(28*0.10)*2+84*0.10 OD:6.0mm	3P XLR(M) to 3P XLR(F) OFC microphone cables
	MC185B-10FT
	MC185B-15FT
	MC185B-20FT
	MC185B-25FT

(28*0.10)*2+84*0.10 OD:6.0mm	3P XLR(M) to 3P XLR(F) OFC microphone cables
	MC185-10FT
	MC185-15FT
	MC185-20FT
	MC185-25FT

(28*0.10)*2+84*0.10 OD:6.0mm	3P XLR(M) to 3P XLR(F) OFC microphone cables
	MC018-10FT
	MC018-15FT
	MC018-20FT
	MC018-25FT

(28*0.10)*2+84*0.10 OD:6.0mm	3P XLR(M) to 3P XLR(F) OFC microphone cables
	MC017-10FT
	MC017-15FT
	MC017-20FT
	MC017-25FT

DMX CABLES

(0.20*7)*2+64*0.12 OD:6.0mm	3P XLR(M-F) DMX cable
	DMX001B-10FT
	DMX001B-15FT
	DMX001B-20FT
	DMX001B-25FT

(0.20*7)*2+64*0.12 OD:6.0mm	3P XLR(M-F) DMX cable
	DMX001-10FT
	DMX001-15FT
	DMX001-20FT
	DMX001-25FT

P57-62线修改.indd 58 2013-11-29 16:59:49

PATCH CABLES

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	2 RCA(M) to 2 RCA(M) OFC patch cable
	YC801-3FT
	YC801-6FT
	YC801-10FT

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	Dual 1/4"(M) to 2 RCA(M) OFC patch cable
	YC802-3FT
	YC802-6FT
	YC802-10FT

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	1/4"(M) to 2 RCA(M) OFC patch cable
	YC803-3ft
	YC803-6ft
	YC803-10ft

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	1/8"(M) to 2 RCA(M) OFC patch cable
	YC804-3ft
	YC804-6ft
	YC804-10ft

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	2 RCA(M) to XLR(M) OFC patch cable
	YC805-3ft
	YC805-6ft
	YC805-10ft

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	2 RCA(M) to XLR(F) OFC patch cable
	YC806-3ft
	YC806-6ft
	YC806-10ft

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	2 RCA(M) to 2 XLR (M) OFC patch cable
	YC807-3ft
	YC807-6ft
	YC807-10ft

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	2 RCA(M) to 2 XLR (F) OFC patch cable
	YC808-3ft
	YC808-6ft
	YC808-10ft

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	Dual 1/4"(M) to Dual 1/4"(M) OFC patch cable
	YC809-3ft
	YC809-6ft
	YC809-10ft

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	Dual 1/4"(M) to 1/4" (M) OFC patch cable
	YC810-3ft
	YC810-6ft
	YC810-10ft

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	Dual 1/4"(M) to 1/8" (M) OFC patch cable
	YC811-3ft
	YC811-6ft
	YC811-10ft

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	1/8" (M) to 1/8" (M) OFC patch cable
	YC812-3ft
	YC812-6ft
	YC812-10ft

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	1/8" (M) to XLR (M) OFC patch cable
	YC813-3ft
	YC813-6ft
	YC813-10ft

[(0.12*20)*2+32*0.12]*2 OD:4*8mm	1/8" (M) to 2 XLR (M) OFC patch cable
	YC814-3ft
	YC814-6ft
	YC814-10ft

P57-62线修改.indd 59 2013-11-29 17:01:42

SPEAKER CABLES

speakon to speakon speaker cable

16AWG 2x1.5mm2 OD: 6.5mm	SKC201-6FT/16
	SKC201-10FT/16
	SKC201-15FT/16
	SKC201-25FT/16
	SKC201-50FT/16
14AWG 2x2.0mm2 OD:7.0mm	SKC201-10FT/14
	SKC201-15FT/14
	SKC201-25FT/14
	SKC201-50FT/14
12AWG 2x3.5mm2 OD:10.0mm	SKC201-15FT/12
	SKC201-25FT/12
	SKC201-50FT/12

neutrik speakon to neutrik speakon speaker cable

16AWG 2x1.5mm2 OD: 6.5mm	SKC208-6FT/16
	SKC208-10FT/16
	SKC208-15FT/16
	SKC208-25FT/16
	SKC208-50FT/16
16AWG 2x1.5mm2 OD: 6.5mm	SKC208-10FT/14
	SKC208-15FT/14
	SKC208-25FT/14
	SKC208-50FT/14
16AWG 2x1.5mm2 OD: 6.5mm	SKC208-15FT/12
	SKC208-25FT/12
	SKC208-50FT/12

1/4" to speakon speaker cable

16AWG 2x1.5mm2 OD: 6.5mm	SKC221-6FT/16
	SKC221-10FT/16
	SKC221-15FT/16
	SKC221-25FT/16
	SKC221-50FT/16
14AWG 2x2.0mm2 OD:7.0mm	SKC221-10FT/14
	SKC221-15FT/14
	SKC221-25FT/14
	SKC221-50FT/14
12AWG 2x3.5mm2 OD:10.0mm	SKC221-15FT/12
	SKC221-25FT/12
	SKC221-50FT/12

1/4" to 1/4" speaker cable

16AWG 2x1.5mm2 OD: 6.5mm	SKC209-6FT/16
	SKC209-10FT/16
	SKC209-15FT/16
	SKC209-25FT/16
	SKC209-50FT/16
14AWG 2x2.0mm2 OD:7.0mm	SKC209-10FT/14
	SKC209-15FT/14
	SKC209-25FT/14
	SKC209-50FT/14
12AWG 2x3.5mm2 OD:10.0mm	SKC207-15FT/12
	SKC207-25FT/12
	SKC207-50FT/12

4 Conductor speakon to speakon speaker cable

14AWG 4x2.0mm2 OD:12.0mm	SKC401-25FT/14
	SKC401-50FT/14
12AWG 4x3.5mm2 OD:15.0mm	SKC401-25FT/12
	SKC401-50FT/12

8 Conductor speakon to speakon speaker cable

16AWG 8x1.5mm2 OD:12.0mm	SKC801-25FT/16
	SKC801-50FT/16
13AWG 8x2.5mm2 OD:14.0mm	SKC801-25FT/13
	SKC801-50FT/13

(15*0.10)*4+60*0.10 OD: 5.0mm

5-PIN Metal MIDI Cable
MDC001-10ft
MDC001-15ft
MDC001-20ft
MDC001-25ft

(15*0.10)*4+60*0.10 OD: 5.0mm

5-PIN Molded MIDI Cable
MDC003-10ft
MDC003-15ft
MDC003-20ft
MDC003-25ft

P57-62线修改.indd 60 2013-11-29 17:01:51

PROFESSIONAL CABLE TESTER

UGC02-5M

USB guitar link cable configure 1/4" TS to USB at standard length 3Meter

UX02-5M

USB Microphone/DMX link cable configure 3-Pin XLR to USB at standard length 3Meter

UMD001

USB MIDI interface ideal for studio recording with your computer

UGC01

USB guitar interface ideal for record your guitar music into your computer, *stereo headphone output lets you jam with your computer and monitoring with active monitor speaker, * Variable-speed file playback function for MP3, WAV, AIFF audio ,* USB bus powered-requires no external power,* High-quality components and exceptionally rugged construction

EC001-5M/14

Nema 5-15P to IEC power cord 5M 14AWG with 15A and 125V

EC002-5M/14

Nema 5-15P to YY3Z power cord 5M 14AWG with 15A and 125V

EC004-5M/1. 5

Schuko to IEC Power Cord 5M 1.5MM2 with 16A and 250V

EC005-5M/1. 5

UK standard power plug to IEC power cord 5M 1.5MM2 with 13A and 250V

EC006-5M/1. 5

Australia standard power plug to IEC power cord 5M 1.5MM2 with 10A and 250V

EC007-5M/14

Nema 5-15P to Powercon 5M 14AWG with 15A and 125V

EC008-5M/1. 5

Schuko to Powercon5M 1.5MM2 with 16A and 250V

EC009-5M/1. 5

UK standard power plug to Powercon 5M 1.5MM2 with 13A and 250V

EC010-5M/1. 5

Australia standard power plug to Powercon 5M 1.5MM2 with 10A and 250V

EC011-5M/1.5

Powercon to Powercon 5M 1.5MM2 with 20A and 250V

APCB15-10M

APCONB15-10M

APCON15-10M

APCONBW15-10M

SCPX19-10M

Audio Power combi cable ,cable size available 18AWG, 15AWG, 13AWG and length available 10M,15M and 20M

19Pin Socapx male to female cable 10M 14AWG with 50A and 250V

P57-62线修改.indd 61 2013-11-29 17:02:18

PROFESSIONAL CABLE TESTER

CT-01
Professional cable tester

Checks XLR mic cables, TRS instrument cables, Speaker cables, Speakon/Neutrik cables, MIDI cables. Just plug each end of your cable into the appropriate connections and turn the knob to check each pin connection.
Dimension: 140x90x37mm

Features:

1/4 TRS, XLR(Male & Female), RCA, MIDI/DIN, and Speakon connections
Pin diagrams on facing
Heavy Duty Metal Construction
9V Battery Compartment (battery not included)

CT-04C
Professional all-in-one cable tester for professional and commercial application

It's a new generation from our CT-02B. Checks XLR mic & DMX cables (3 pin & 5 pin), TRS instrument cables, Speaker cables, Speakon/Neutrik cables (4 pin & 8 pin), MIDI cables, USB(A-A) & RJ45 Cat-5 cables! Just plug each end of your cable into the appropriate connections and turn the knob to check each pin connection.

FEATURES:

Connections for
- 1/4 TRS
- XLR(Male & Female) (3 Pin & 5 Pin)
- RCA
- MIDI/DIN (3 Pin, 5 Pin, 7 Pin, 8 Pin)
- Speakon (4 Pin & 8 Pin)
- USB(A-A)
- RJ45(Cat-5 cables)

Pin diagrams on facing
Heavy Duty Metal Construction
9V Battery Compartment (battery not included)

CT-04D/CT-04E

Connections for
- 1/4 TRS
- XLR(Male & Female) (3 Pin & 5 Pin)
- RCA
- MIDI/DIN (3 Pin, 5 Pin, 7 Pin, 8 Pin)
- Speakon (4 Pin & 8 Pin)
- USB(A-B)
- RJ45(Cat-5 cables)

Pin diagrams on facing
Heavy Duty Metal Construction
9V Battery Compartment (battery not included)

CT-04D

CT-04E

CT-08

9 in 1 cable tester workes for almost all daily used pro audio cables, which includes:
1/8”(3.5mm) jack
1/4”(6.35mm) jack
3/5-Pin XLR
RCA
3/5/8-Pin Din
4-Pole Speakon
RJ45
USB A-A/B

CT-08A

Push botton easy to use all in one digital cable tester
Features:
Battery powered(DO NOT INCLUDED)
1/4",3&5-Pin XLR(M/F),RCA,3&5&8-Pin Din,4-Pole speakon, 1/8",RJ45,USB(A-B)

P57-62线修改.indd 62 2013-11-29 17:02:38

BULK WIRE

CODE	WIRE SHOWN	OPTION COLOR CODE	Description	OUTER DIAMETER
I001		 (1) (2) (3) (4) (5) (6) (7)	20x0.12+64x0.12	5.0mm
I002				6.0mm
I003				6.7mm
I004		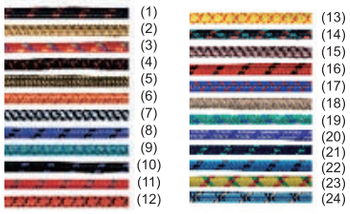 (1) (2) (3) (4) (5) (6) (7) (8) (9) (10) (11) (12) (13) (14) (15) (16) (17) (18) (19) (20) (21) (22) (23) (24)	20x0.12+64x0.12	6.0mm
I005				6.5mm
I006				7.5mm
I007		 (1) (2) (3) (4) (5)	35x0.12+16x7x0.12	6.0mm
I008				6.5mm
I009		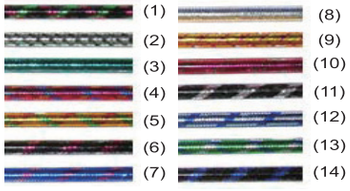 (1) (2) (3) (4) (5) (6) (7) (8) (9) (10) (11) (12) (13) (14)	20x0.12+64x0.12	6.5mm
I010				7.0mm
MPS006		6	(20x0.10)x2+7x0.20	11.0mm
MPS008		8		13.0mm
MPS012		12		14.0mm
MPS016		16		15.0mm
MPS020		20		20.0mm
MPS024		24		22.0mm
MPS028		28		24.0mm
MPS032		32		25.0mm
MPS036		36		26.0mm
MPS040		40		27.0mm
MPS044		44		29.0mm
MPS048		48		29.0mm

P63-65裸线修改.indd 63 2013-11-29 17:01:04

BULK WIRE

CODE	WIRE SHOWN	OPTION COLOR CODE	Description	OUTER DIAMETER
M008		 (1) (2) (3) (4) (5) (6) (7)	(20x0.12)x2+64x0.12	6.0mm
M009				6.7mm
M010		(1) (2) (3) (4) (5) (6) (7)	(28x0.10)x2+84x0.10	5.0mm
M011				6.0mm
M012				6.7mm
M013		 (1) (2) (3) (4) (5) (6) (7) (8) (9) (10) (11) (12) (13) (14) (15) (16) (17) (18) (19) (20) (21) (22) (23) (24)	(28x0.10)x2+84x0.10	6.0mm
M014				6.5mm
M015				7.5mm
M016		 (1) (2) (3) (4) (5)	(28x0.10)x2+16x7x0.12	6.0mm
M017				6.5mm
M020		 (1) (2) (3) (4) (5)	(38x0.10)x2+112x0.12	6.0mm
M021			(64x0.12)x2+128x0.12	6.5mm
D001		 (1) (2) (3) (4) (5) (6) (7)	(7x0.20)x2+64x0.12	6.0mm
D002				6.5mm
Y001		(1) (2) (3) (4) (5) (6)	(20x0.12+32x0.12)x2	3x6mm
Y002				4x8mm
Y003				5x10mm
Y004				6x12mm
Y010			[(20x0.12)x2+32x0.12]x2	4x8mm
Y011				5x10mm
Y012				6x12mm

P63-65裸线修改.indd 64 2013-11-29 17:01:26

BULK WIRE

CODE	WIRE SHOWN	GAUGE	CONFIGURATION	OUTER DIAMETER
S001		18GA	2x0.75mm2	5.0mm
S002		15GA	2x1.5mm2	6.5mm
S003		14GA	2x2.0mm2	7.0mm
S004		13GA	2x2.5mm2	8.0mm
S005		12GA	2x3.5mm2	10.0mm
S006		15GA	4x1.5mm2	10.0mm
S007		14GA	4x2.0mm2	12.0mm
S008		13GA	4x2.5mm2	12.0mm
S009		12GA	4x3.5mm2	15.0mm
S010		15GA	6x1.5mm2	11.0mm
S011		14GA	6x2.0mm2	13.0mm
S012		13GA	6x2.5mm2	14.0mm
S013		12GA	6x3.5mm2	16.0mm
S014		15GA	8x1.5mm2	12.0mm
S015		13GA	8x2.5mm2	14.0mm
S016		20GA	2x0.5mm2	2.5x5mm
S017		19GA	2x0.65mm2	2.5x5mm
S018		18GA	2x0.75mm2	2.5x5mm
S019		17GA	2x1.0mm2	2.5x5mm
S020		16GA	2x1.3mm2	3.5x7.0mm
S021		15GA	2x1.5mm2	3.5x7.0mm
S022		14GA	2x2.0mm2	3.8x7.6mm
S023		13GA	2x2.5mm2	3.8x7.6mm
S024		12GA	2x3.5mm2	6x12mm
S025		11GA	2x4.0mm2	6x12mm
S026		10GA	2x5.0mm2	6x12mm
S027		9GA	2x6.0mm2	6x12mm
IST228		AUDIO INSTALLATION CABLE	(7x0.26)x2+7x0.26	4.5mm
RG6		**RG6:**1.00CCS+32/0.12AL/MG+0.05AL FOLL +FOAM PE4.7+JACKET(0.95MM)67		6.9mm

P63-65裸线修改.indd 65 2013-11-29 17:01:35

PRO AUDIO CONNECTORS

XLR001(3P)

XLR002(3P)

XLR003(3P)

XLR004(3P)

XLR003B(3P)

XLR004B(3P)

XLR007(3P)

XLR008(3P)

XLR007B(3P)

XLR008B(3P)

XLR009(3P)

XLR010(3P)

XLR031(3P)

XLR032(3P)

YS136N(3P)Neutrik

YS136N(3P)Neutrik

XLR029(3P)

XLR030(3P)

XLR033(3P)

XLR034(3P)

XLR049(3P)

XLR050(3P)

XLR059(3P)

XLR060(3P)

XLR066(3P)

XLR067(3P)

XLR063(3P)

XLR064(3P)

XLR181(3P)

XLR182(3P)

P66-75头子修改.indd 66 2013-11-29 17:01:59

PRO AUDIO CONNECTORS

XLR101(3P)

XLR102(3P)

XLR103(3P)

XLR104(3P)

XLR105(3P)

XLR108(3P)

XLR109(3P)

XLR112(3P)

XLR113(3P)

XLR123(3P)

XLR126(3P)

XLR127(3P)

QT003B

QT003G

QT004

QT014

QT017

QT018

QT026

QT027

QT028

QT029G

QT032

QT033

QT045

QT046

QT049G

QT051

QT052

QT055

P66-75头子修改.indd 67 2013-11-29 17:02:07

PRO AUDIO CONNECTORS

QT056

QT064

QT067G

QT074G

QT089

QT101(F)

QT102

QT106

QT110

QT111

QT114

QT115

QT116

QT117

SPN001N

SPN001(4P)
SPN002(8P)

SPN003(4P)
SPN004(8P)

SPN007(4P)

SPN008(4P)

SPN009(4P)

SPN022(4P)

SPN023(8P)

SPN024(4P)

SPN026(8P)

SPN028(4P)

RCA002

RCA003

RAC008

RCA009

RCA010

P66-75头子修改.indd 68 2013-11-29 17:02:19

PRO AUDIO CONNECTORS

RCA011

RCA021

RCA037

RCA043

RCA056

RCA070

RCA071(RCA)

BNC001

ADT002
XLR(F)/XLR (F)

DT003
XLR(F)/XLR(M)

ADT004
XLR(M)/XLR(M)

ADT049
XLR(F3P)/XLR(M5P)

ADT050
XLR(F5P)/XLR(M3P)

ADT013
XLR(F)/1/4

ADT014
XLR(M)/1/4

ADT015
XLR(F)/1/4

ADT016
XLR(M)/1/4

ADT017
XLR(F)/1/4(F)

ADT018
XLR(M)/1/4(F)

ADT019
XLR(F)/RCA(M)

ADT020
XLR(M)/RCA(M)

ADT021
XLR(F)/RCA(F)

ADT022
XLR(M)/RCA(F)

ADT023
XLR(F)/RCA(F)

ADT024
XLR(M)/RCA(F)

ADT025
XLR(F)/RCA(M)

ADT026
XLR(M)/RCA(M)

ADT031
XLR(F)/M

ADT032
XLR(M)/M

ADT033
XLR(F)/F

P66-75头子修改.indd 69 2013-11-29 17:02:24

PRO AUDIO CONNECTORS

ADT034
XLR(M)/F

ADT035
1/4(F)/F

ADT036
1/4(F)/M

ADT037
M/M

ADT038
1/4(F)/1/4(F)

ADT046
XLR(F)/1/4

ADT048
XLR(M)/1/4

ADT101
RCA(F)/1/4

ADT102
RCA(F)/1/4

ADT103
RCA(F)/1/4

ADT104
1/4(F)/1/4

ADT105
1/4(F)/1/4

ADT106
1/8(F)/1/4

ADT107
1/8(F)/1/4

ADT108
1/4(F)/1/8

ADT109
1/4(F)/1/8

ADT110
1/8/RCA(F)

ADT111
1/8/RCA(F)

ADT117
2xRCA(F)/1/8

ADT118
2xRCA(F)/RCA(F)

ADT119
2xRCA(F)/RCA(M)

ADT120
2xRCA(F)/1/4

ADT121
2xRCA(F)/1/4

ADT126
RCA(M)/1/4(F)

ADT127
RCA(F)/RCA(F)

ADT128
1/4/1/8(F)

ADT129G
1/4/1/8(F)

ADT131
1/4(F)/1/4(F)

ADT134
RCA/RCA

ADT136
1/4/1/4

P66-75头子修改.indd 70 2013-11-29 17:02:29

PRO AUDIO CONNECTORS

ADT156
XLR(F)/XLR(F)

ADT157
XLR(M)/XLR(F)

ADT158
1/4"(F)/XLR(F)

ADT159
XLR(F)/SPEAKON(F)

ADT160
SPEAKON(F)/XLR(M)



ADT161
Powercon adaptor

ADT162
SPEAKON(F)/1/4"(F)

ADT163
SPEAKON(F)/SPEAKON(F)

ADT164
XLR(M)/XLR(M)

ADT165
1/4"(F)/XLR(M)

XLR3FM
3 Pin XLR female and male combo inline connector

NL4FX

NL2FC

NL4FC

NC3FX

NC3MX

NC3FX-B

NC3MX-B

NC3FXX

NC3MXX

NC3MXX-B

NC3FXX-B

NAC3FCB

NAC3FCA

NAC3MPB-1

NAC3MPA-1

NP2X

NP2X-BAG

NP3X

NP3X-BAG

P66-75头子修改.indd 71 2013-11-29 17:03:06

PRO AUDIO CONNECTORS

ADT139
1/8(F)/1/8

ADT140
1/8(F)/1/8

ADT153
2xRCA(F)/2xRCA(F)

BC003

BC004RD
BC004BLK

BC006RD
BC006BLK

BP003

BP008

BP016

BP021

BP022

BP026

BP105

AC001(2P-9P)

AC009(2P-9P)

AC017(2P-9P)

AC025(2-9)

AC026(2-9)

DIN001

DIN002

DIN003

DIN005

WP008

WP009

WP010

WP014

WP016

WP017

WP018

WP020(RCA)

P66-75头子修改.indd 72 2013-11-29 17:03:11

PRO AUDIO CONNECTORS

WP023(BNC)

FB003

FB009

FB011

FB012

FB013

FB014

FB015

SCPX-F7Q

SCPX-M7Q

SCPX-CF7Q

SCPX-CM7Q

SCPX-F19Q

SCPX-M19Q

SCPX-CF19Q

SCPX-CM19Q

PC3FCA

PC3MPA

PC3FCB

PC3MPB

K18Z2

K18Z3

K18Z6

K18P4

K18E4

FRCA001N
F plug - RCA M

F001N
F plug

FRCA001G
F plug - RCA M

F001G
F plug

VC001
BNC F - RCA M

P66-75头子修改.indd 73 2013-11-29 17:03:30

PRO AUDIO CONNECTORS

XLR193

XLR194

XLR193Y

XLR194Y

XLR193BL

XLR194BL

XLR193RD

XLR194RD

XLR193ORG

XLR194ORG

XLR185

XLR186

XLR185Y

XLR186Y

XLR185BL

XLR186BL

XLR185RD

XLR186RD

XLR185ORG

XLR186ORG

XLR187

XLR188

XLR187Y

XLR188Y

XLR187BL

XLR188BL

XLR187RD

XLR188RD

XLR187ORG

XLR188ORG

P66-75头子修改.indd 74 2013-11-29 17:04:12

PRO AUDIO CONNECTORS

QT159RD

QT160RD

QT159Y

QT60Y

QT159ORG

QT60ORG

QT161RD

QT162RD

QT161Y

QT162Y

QT161ORG

QT162ORG

XLR063W

XLR064W

XLR063SK

XLR064SK

XLR071

XLR072

XLR069

XLR070

ADT-3XMM

XLR005N

XLR006N

XLR007W

XLR008W

SPN001N-ORG

SPN001-ORG

XLR191

XLR192

QT156

P66-75头子修改.indd 75 2013-11-29 17:05:03

MICROPHONE STAND

MS001
Height: 980-1680mm
Arm Length: 800mm
Base: Metal
Tube(mm): 19(leg)-20(center)-14(moving)

MS001T
with adjustable telescope boom 530-910mm

MS002
Height: 980-1680mm
Arm Length: 800mm
Base: Metal
Tube(mm): 19(leg)-20(center)-14(moving)

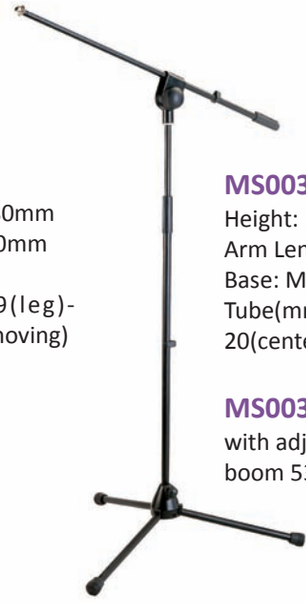

MS003
Height: 1000-1760mm
Arm Length: 800mm
Base: Metal
Tube(mm): 19(leg)-20(center)-14(moving)

MS003T
with adjustable telescope boom 530-910mm

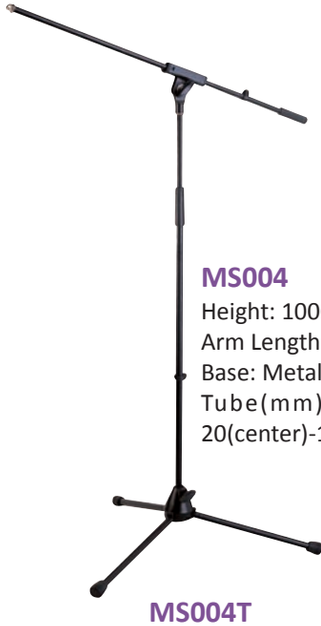

MS004
Height: 1000-1760mm
Arm Length: 800mm
Base: Metal
Tube(mm): 19(leg)-20(center)-14(moving)

MS004T
with adjustable telescope boom 530-910mm

NEW

MS588 BLACK
MS588BL BLUE
MS588Y YELLOW
MS588RD RED

Height:1150-1700mm
Arm Length:530-910mm
Available Color:Red/Yellow/Blue/Black
Tube(mm): 19(leg)-25(center)-19(moving)

MS007 BLACK
MS007BL BLUE
MS007Y YELLOW
MS007RD RED

Height:1150-1700mm
Arm Length:530-910mm
Available Color:Red/Yellow/Blue/Black
Tube(mm): 19(leg)-25(center)-19(moving)
Inner box:10*10*92.5cm(1pcs)
Master Carton:32*22*95cm(6pcs)

P76-91支架修改.indd 76 2013-11-29 17:02:17

MICROPHONE STAND

RD-IPDS-CLP

Ipad holder with mount clip (to mic stands)
For ipad1,ipad2 and the new
4 colors available:red,yellow,black,blue

MS007-IPDS-CLP BLACK
MS007RD-IPDS-CLP RED
MS007BL-IPDS-CLP BLUE
MS007Y-IPDS-CLP YELLOW

Height:1150-1700mm
Arm Length:530-910mm
Available Color:Red/Yellow/Blue/Black
Tube(mm): 19(leg)-25(center)-19(moving)
Inner box:10*10*92.5cm(1pcs)
Master Carton:32*22*95cm(6pcs)

MS136-IPDS-CLP BLACK
MS136RD-IPDS-CLP RED
MS136BL-IPDS-CLP BLUE
MS136Y-IPDS-CLP YELLOW

Height:1150-1700mm
Arm Length:530-910mm
Available Color:Red/Yellow/Blue/Black
Base Diameter:Φ250mm
Tube(mm): 25(center)-19(moving)

MS129RD-IPDS RED
MS129Y-IPDS YELLOW
MS129-IPDS BLACK
MS129BL-IPDS BLUE

Height:1040-1560mm
Base Diameter:Φ250mm
Available Color:Red/Yellow/Blue/Black
Inner box:9*9*92.5cm(1pcs)
Master Carton:30*20*95cm(6pcs)
Tube(mm): 25(center)-19(moving)

MS129 BLACK
MS129-RD RED
MS129-Y YELLOW
MS129-BL BLUE

Height:1040-1560mm
Base Diameter:Φ250mm
Available Color:Red/Yellow/Blue/Black
Tube(mm): 25(center)-19(moving)

IPDS
Ipad holder
For ipad1,ipad2 and the new ipad,
4 colors available:red,yellow, black,blue

IPHS
Rotation holder for two usage
Can be absorbed in the glass, desk
Can be mounted in the microphone stand
For Iphone/Sumsung/HTC/Nokia etc.
Adjustable width
Adjustable viewing angle
360 degrees rotation

P76-91支架修改.indd 77 2013-11-29 17:02:34

MICROPHONE STAND

MS005
MS005T Same specifications as MS004&MS004T

MS008
Height: 560-800mm
Arm Length: 530-910mm
Base: Metal
Tube(mm): 19(leg)-20(center)-14(moving)

MS009
Height: 540-800mm
Arm Length: 530-910mm
Base: Metal
Tube(mm): 19(leg)-20(center)-14(moving)

MS013
Pro studio boom stand with weight adjustable counter to ensure precise balance
Height: 1500-2360mm
Arm Length: 1140-940mm
Folded height: 140mm
Weight: 7.5kgs
Base: Metal
Tube(mm): 35(leg)-40(center)-35(moving)

MS014
Pro studio boom stand with weight adjustable counter to ensure precise balance
Height: 1360-230mm
Arm Length: 1180-2210mm
Folded height: 137mm
Weight: 12.25kgs
Base: Metal
Tube(mm):30(center)-25(moving)

MS015
Quick release unique design tripod mic stand with telescope boom
Tube(mm): 19(leg)-20(center)-14(moving)

P76-91支架修改.indd 78 2013-11-29 17:02:39

MICROPHONE STAND

MS104
Height:880-1580mm
Dia. Of Base:250mm

MS104-4
MS104 with boom
Height:880-1580mm
Dia. of base:250mm

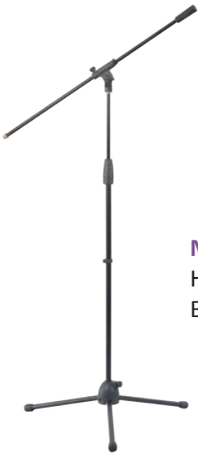

MS133
Height:1000-1760mm
Base: Plastic

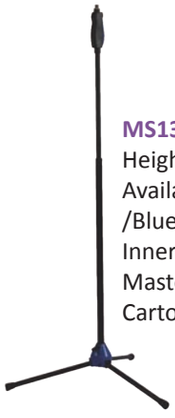

MS134
Height:1040-1560mm
Available Color:Red/Yellow /Blue/Black
Inner box:9*9*92.5cm(1pcs)
Master Carton:30*20*95cm(6pcs)

MS135
Height:880-1580mm
Base: Plastic

MS226
Pro microphone pop filter

MS123
Studio microphone for both clamp and screw in application

MICROPHONE STAND ACCESSORIES

MS230

MS231

MS201 M: 3/8"-3/8" O.D: 11*200mm(8")
MS202 M: 3/8"-3/8" O.D: 15*200mm(8")
MS204 M: 3/8"-3/8" O.D: 15*400mm(16")

MS206 M: 3/8"-3/8" O.D: 18.5*600mm(24")

MS120

MS122

MS122-1

MS209

MS211

MS214

P76-91支架修改.indd 79 2013-11-29 17:02:59

SPEAKER STAND

SPS003SL
Max. height:1800mm
Load Capacity: 50kg
Material: Steel
Tube(mm): 35(leg)-38(center)-35(moving)

SPS003SM
Max. height:2000mm
Load Capacity: 60kg
Material: Steel
Tube(mm): 35(leg)-40(center)-35(moving)

SPS003SH
Max. height:2200mm
Load Capacity: 70kg
Material: Steel
Tube(mm): 35(leg)-42(center)-38(moving)

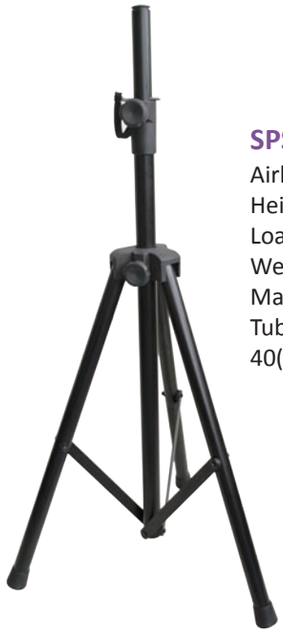

SPS007
Airhead speaker stand
Height: 1140-2000mm
Loading capcity: 70kgs
Weight: 2.6kgs
Material: Aluminum
Tube(mm):35(leg)-40(center)-35(moving)

SPS004
Height: 2000mm
Weight: 4kg
Material: Aluminum
Load Capacity: 80kg
Tube(mm):38(leg)-45(center)-38(moving)

SPS007BL
Airhead speaker stand
Height: 1140-2000mm
Loading capcity: 70kgs
Weight:2.6kgs
Junction color:Blue
Junction Material:Metal
Tube Material: Aluminum
Tube(mm):35(leg)-40(center)-35(moving)

P76-91支架修改.indd 80 2013-11-29 17:03:15

SPEAKER STAND

SPS002
Height: 1000-2000mm
Load Capacity: 60kg
Material: Aluminum
Tube(mm):35(leg)-42(center)-38(moving)

SPS005
Height: 1250-3000mm
Load Capacity: 80kg
Material: Steel
Tube(mm):35(leg)-45(center)-42(center moving)-38(top moving)

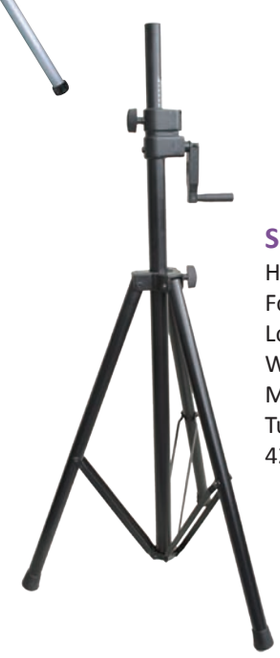

SPS009
Height: 1200-1800mm
Folded Height: 1080mm
Load Capacity: 50kg
Weight: 3.2kg
Material: Steel
Tube(mm):35(leg)-42(center)-35(moving)

SPS011
Height:1000-1800mm
Load Capacity:35kgs
Inner box:11*9*92cm (1pcs)
Master box:39*24*92cm (8pcs)
Tube(mm):25(leg)-30(center)-25(moving)

WMS015
Height: 690-1300mm
Plate size: 230x230mm
Base: 450x450x450mm
Material: Steel
Center tube:35mm
Head:230x230x2mm

WMS017
Height: 800-1340mm
Load capacity: 50kgs
Material: steel
Tube: 35-35mm

WMS018
Height: 800-1340mm
Load capacity: 25kgs
Material: steel
Tube: 25-35mm
Tube(mm):35(center)-40(moving)

P76-91支架修改.indd 81 2013-11-29 17:03:21

SPEAKER/DJ STAND

SPS003SL-KIT
2x SPS003SL speaker stand, 1x KSP13 portable bag with 2x SKC229 speaker cables

SPS007BL-KIT
2x SPS007BL speaker stand, 1x KSP13 portable bag with 2x SKC229 speaker cables

SPS003SL-Bag
2x SPS003SL stand with 1x KSP13 portable bag

SPS007BL-Bag
2x SPS007BL stand with 1x KSP13 portable bag

DJS001
DJ Laptop stand available for an extra storage shelf

DJS002
DJ Laptop stand with shelf

DJS003
DJ Laptop Stand with shelf Height adjustable Angle adjustable Rotatable Ttray Removable sub tray Fits 13"-18" laptop,ipad or controller Airflow constructed tray prevents equipment from overheating

DJS004
DJ Laptop Stand with shelf Height adjustable Fits 13"-18" laptop,ipad or controller Airflow constructed tray prevents equipment from overheating

DJS005
DJ Laptop Stand Fits perfectly over a 12" club mixer like a pioneer DJM-800 Features non-slip rubber surface Height adjustable Widthadjustable

P76-91支架修改.indd 82 2013-11-29 17:03:43

SPEAKER STAND&ACCESSORIES

WMS004

WMS005

WMS006

WMS008



WMS011

WMS009

WMS010

SPSA002

SPSA003

SPSA009



SPSA013

SPSA014

SPSA015

SPSA016

SPSA017 plastic
Size: 54*54*81mm

SPSA018

SPSA019



SPSA020



SPSA021

SPSA022

SPSA023

SPSA024
4"-18"
thickness:0.8mm

SPSA025

SPSA026BK
Black carpet
SPSA026GY
Gray carpet

SPSA028
38*20mm

SPSA029

SPSA030

SPSA031

WMS019

P76-91支架修改.indd 83 2013-11-29 17:03:49

HEAVY-DUTY GROUND SUPPORT

LS012
Height: 1890-5000mm
Base spread diameter: 2100mm
Center tube diameter:60-50-40mm
Folded Height: 1890mm
Load Capacity: 120kg
Weight: 60kg

LS013
Height: 1750-5400mm
Base spread diameter: 2100mm
Center tube diameter:60-50-40mm
Folded Height: 1750mm
Load Capacity: 160kg
Weight: 65kg

LS014
Height: 1840-6500mm
Base spread diameter: 2500mm
Center tube diameter:60-50-40mm
Folded Height: 1840mm
Load Capacity: 220kg
Weight: 99kg

LS016
Heavy-duty Stage Lighting Stand
Height:1750-5600mm
Base spread dia.:2170mm
Center tube diameter:
120*120*3.0, 100*100*2.0, 80*80*2.0,
60*60*2.0, Φ48*3.0, 50*50*1.5
Folded Height:1750mm
Load Capacity:220kgs
Weight:105kgs
With side wheels, more convnient to move

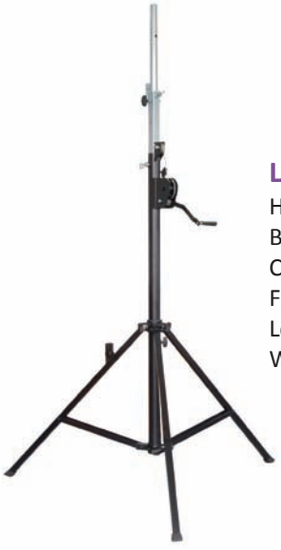

LS015
Height: 1870-4500mm
Base spread diameter: 1170-1620mm
Center tube diameter: 60mm
Folded Height: 1660mm
Load Capacity: 120kg
Weight: 19kg

LS018
Ultra Heavy-duty Stand for line array
Max Load: 270kg
Min Load: 30kg
Max Height: 8000mm
Min Height: 2100mm
Weight: 245KGS

TB100
TB100L
Truss support bar for crank stand and ground support size adjustable from 115mm to 406mm

T-200
T-150
T-120

Variety length
T-bar for LS001,LS011,LS015

T-200	**2.0m**
T-150	**1.5m**
T-120	**1.2m**

P76-91支架修改.indd 84 2013-11-29 17:03:55

LIGHTING STAND

TRUSS

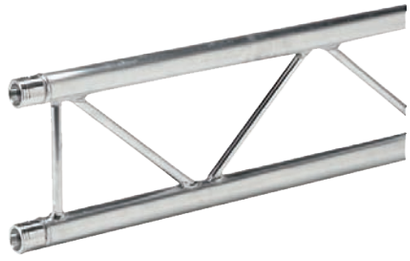

I-BEAM TRUSS AT 1/2M,1M,2M,3M,4M

300x300MM	400x400MM
IT300-1/2	IT-400-1/2
IT300-1	IT400-1
IT300-2	IT400-2
IT300-3	IT400-3
IT300-4	IT400-4



SS001
Spigot with safety spring

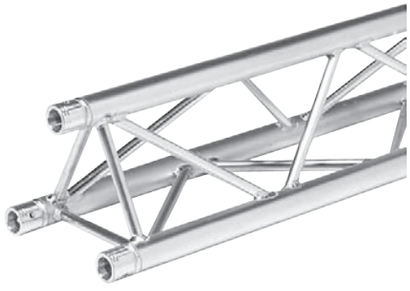

TRANGULAR TRUSS AT 1/2M,1M,2M,3M,4M

300x300MM	400x400MM
TT300-1/2	TT-400-1/2
TT300-1	TT400-1
TT300-2	TT400-2
TT300-3	TT400-3
TT300-4	TT400-4

CC002
Conical coupler

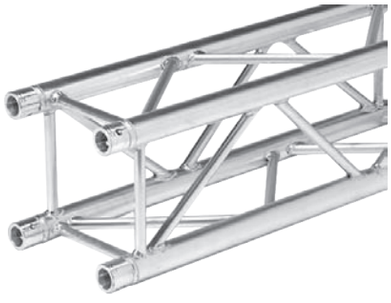

SQUARE TRUSS AT 1/2M, 1M,2M,3M,4M

300x300MM	400x400MM
ST300-1/2	ST400-1/2
ST300-1	ST400-1
ST300-2	ST400-2
ST300-3	ST400-3
ST300-4	ST400-4



CLP01
Clamp

CRANK STAND
TRUSS SYSTEM

P76-91支架修改.indd 85 2013-11-29 17:04:05

LIGHTING STAND

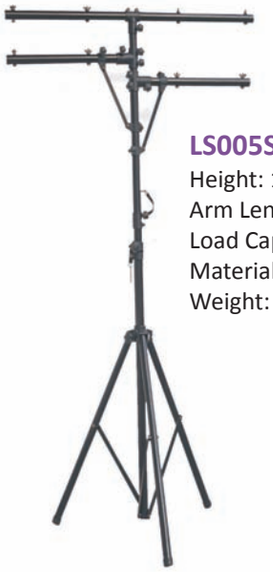

LS005S
Height: 1450-3220mm
Arm Length: 1220mm
Load Capacity: 45kg
Material: Steel
Weight: 6kg

LS006S
Height: 1450-3220mm
T-bar: 950mm
Load capacity: 50kg
Material: Steel

LS008S
Height: 1200-2200mm
Arm Length: 1220mm
Load Capacity: 25kg
Material: Steel
Weight: 3kg

LS001
Height:1870-3500mm
Base spread diameter:1170-1620mm
Center tube diameter:55mm
Fold Height:1840mm
Load capacity:100kg
Material: Steel
Weight:15.5kg

LS015H
Height:1870-4500mm
Base spread diameter:1170-1620mm
Center tube diameter:60mm
Folded Height:1660mm
Load Capacity:120KG
Material: Steel
Weight:19kg

LS004S
Height: 1610-3220mm
Arm Length: 1220mm
Load Capacity: 40kg
Material: Steel
Weight: 15kg

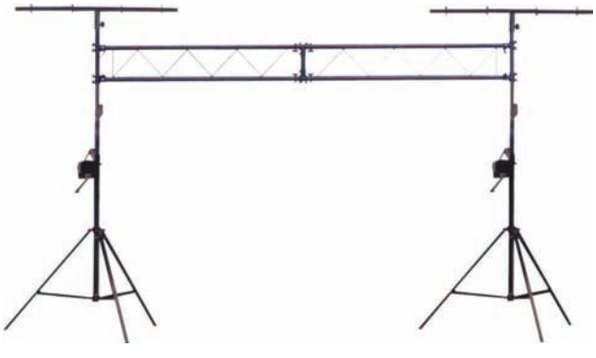

LS010S
Height: 1870-3000mm
Base spread diameter: 980-1520mm
Center tube diameter: 35/38mm
Fold Height: 1070mm
Weight Capacity: 150kg
Weight: 20kg

P76-91支架修改.indd 86 2013-11-29 17:04:10

RACK/KEYBOARD STAND

RKS001
Height: 1290mm
Base Size: 560(W)x580(D)
Material: Steel
Shipping Package: 62x28x134cm

RKS002
Height: 915mm
Base Size: 560(W)x560(D)
Material: Steel
Shipping Package: 90x30x60cm

RKS008
Width range:432-660mm
Depth range:356-445mm
Height range:616-813mm
Frame tubing size:30mm
Load capacity:135kg
Weight:5.9kg

RKS015 RKS016
Height:69-95cm
Platform:W:37-54cm/D:30-41cm
Weight capacity:36kg
Weight:6.2kgs
RKS016 with wider plateform of 50-69cm

Fully foldable aluminum column keyboard stand
optional for microphone boom attached, keyboard location adjustable,
Fold dimension: 125cm(H)x12cm(W)x12cm(D),
arm length: 40cm ,
main feet:46cm ,
net weight: 8.7kgs,
weight capacity per tier: 35kgs.

KSP08
Portable bag with foam padding for KS014 and KS015
Weight:0.5kg

KS014

KS014M

KS015

KS015M

P76-91支架修改.indd 87 2013-11-29 17:04:15

COLUMN STYLE KEYBOARD STAND

KS088

Fully foldable aluminum column keyboard stand
Height:1168mm
Folded Length:1321mm
Load Capacity: up to 56kgs per tier or 113kgs total
Available Color:Red/Yellow/Blue/Black/Silver
Material:Aluminum

KSP13

Conveniently transport and store stands.
Portable bag for KS088

KS088

KS088M

Keyboard stand KS088M with microphone boom KSP09

KS088RD

KS088RD-KSP10

Keyboard stand KS088RD with ipad holder KSP10

KS088BL

KS088BL-KSP11

Keyboard stand KS088BL with laptop holder KSP11

KS088S

KS088S-KSP12

Keyboard stand KS088S with book plate KSP12

All-in-one keyboard stand KS088 with KSP09,KSP10,KSP11,KSP12

KSP09

KSP10

KSP11

KSP12

P76-91支架修改.indd 88 2013-11-29 17:04:53

"X" STYLE KEYBOARD STAND

KS005D
Detachable keyboard stand
Saving the shipping cost
Height: 170-970mm
Arm Length: ϕ28x400mm
Material: Steel

KS005DS
Detachable keyboard stand
Plus a top shelf
Height: 170-970mm
Arm Length: ϕ28x400mm
Material: Steel

KS006D
Detachable keyboard stand
Saving the shipping cost
Height: 170-970mm
Arm Length: ϕ28x400mm
Material: Steel

KS006DS
Detachable keyboard stand
Plus a top shelf
Height: 170-970mm
Locking junction color:Blue
Arm Length: ϕ28x400mm
Material: Steel

Undetachable

Detachable

All keyboard stand can be made into detachable style
Saving packing cost and shipping cost

KS028
Autolock keyboard stand
Height: 530-990mm
Weight: 5.4 kg
Load capacity: 100 kg

KS029
Keyboard stand with two-tier
Height:670-910mm
Width:395mm
Base Size: 650-1030x240mm
Material: Steel

KS006DTH
Detachable keyboard stand with two-tier
Height: 170-1310mm
Arm Length:Φ30x350mm
Inner Box:67x12.5x109cm(1pcs)
Master Box:69x40x112cm(3pcs)

KS022
Keyboard stand with wheels
Height: 170-970mm
Arm Length: ϕ28x400mm
Material: Steel
Can be act as a cart

P76-91支架修改.indd 89 2013-11-29 17:05:18

MUSIC SHEET STAND

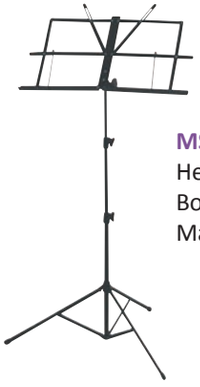

MSS001
Height: 640-1270mm
Book plate size:505(W)-290(D)
Material: Steel

MSS004
Music sheet stand
Height:940-1420mm
Book plate size:475x345mm
Material:Steel
2 support weld on metal plate

MSS005
Music sheet stand
Height:940-1420mm
Book plate size:475x345mm
Material:Steel
insert and screw on

MSS008
Foldable book plate
Height: 940-1420mm
Book plate size:475(W)x345(D)
Material: Steel

MSS009
Spring loaded Quick-release music stand fully foldable
Height: 950-1450mm
Book plate : 480x350mm
Leg spread: 690mm
Weight: 4.5kgs

MSS011
3 foldable book plate music sheet stand
Height: 900-1300mm
Book plate size: 500-975(W)x340(D)
Material: Steel

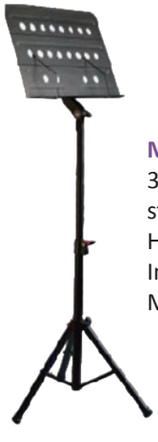

MSS013
3 foldable book plate music sheet stand
Height: 940-1420mm
Inner box:16x13x61cm(1pcs)
Master Carton:68x18x63cm(6pcs)

B08
Deluxe piano style bench with sheet music compartment
Height: 50cm
Length: 58.5cm
Width: 35cm
Weight: 7.5kgs
Weight capacity: 110kgs

P76-91支架修改.indd 90 2013-11-29 17:05:44

GUITAR STAND

GS001
Height: 440mm
A-Frame Size: 210-345mm
Material: Steel



GS002
Height: 440mm
A-Frame Size: 210-345mm
Material: Steel

GS013
Guitar footrest variety optional colors
RED, GREEN, BLUE, YELLOW, BLACK

GS001D BLACK
GS001DBL BLUE
GS001DRD RED
GS001DY YELLOW
Detachable guitar stand
For saving shipping cost,
Available colors: black,
blue,red,yellow

GS006
Height: 780-910mm
Material: Steel

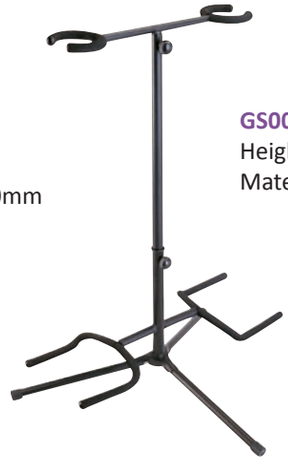

GS007
Height: 790-910mm
Material: Steel

GS008
Height: 635-750mm
Material: Steel

GS019

GS020

GS021

CS01
Cable Stand

P76-91支架修改.indd 91 2013-11-29 17:05:55